




TOOLS NEEDED


Hammer




Punch




Phillips Screwdriver

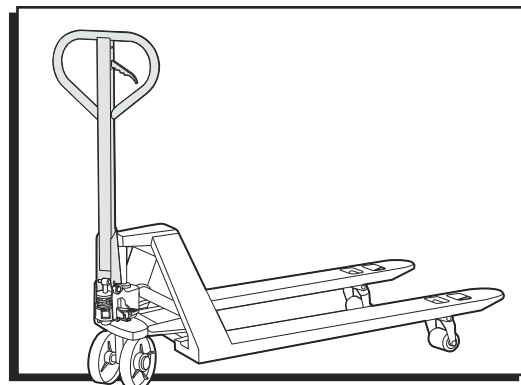**REPLACING HANDLE**


1. Push down handle lever. (See Figure 1)

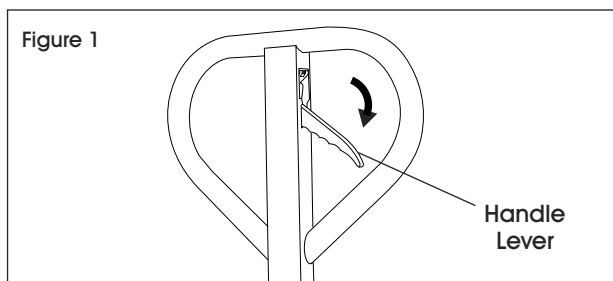


2. Push lever down and detach chain. (See Figure 2)

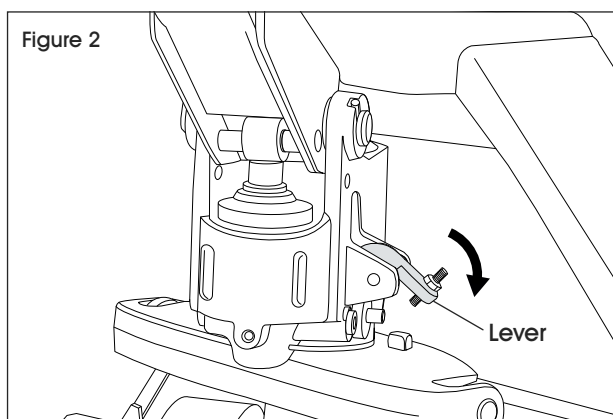


3. Lower handle. (See Figure 3)

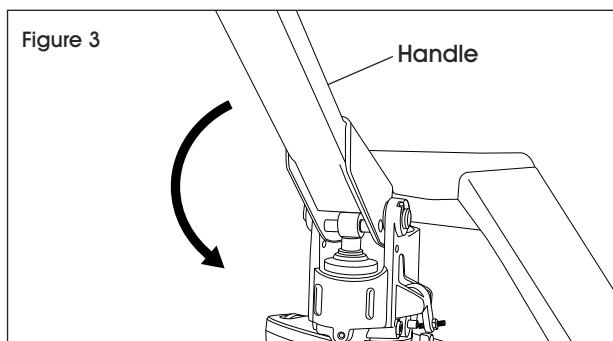

4. Insert Phillips screwdriver through holes. (See Figure 4)


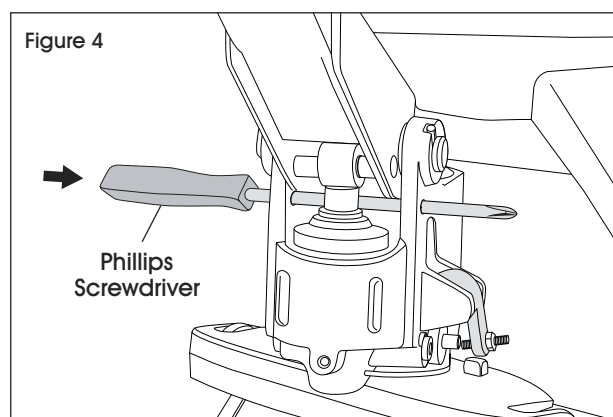


5. Use hammer and punch to remove one spring pin from shaft. (See Figure 5)


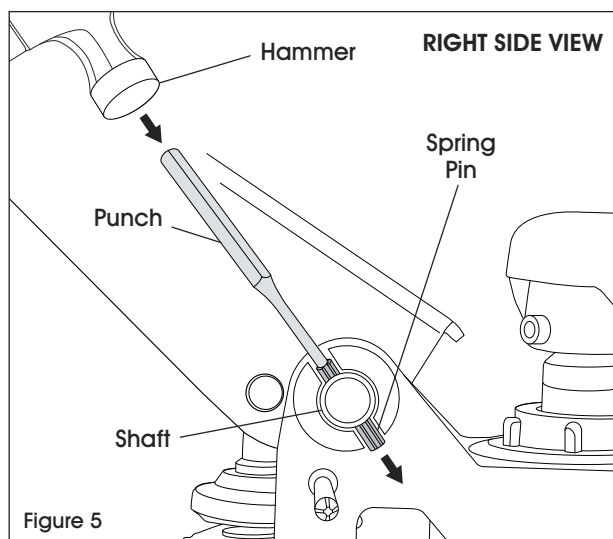


REPLACING HANDLE CONTINUED


6. Pull chain and bolt over shaft until it hangs from the handle. (See Figures 6-7)

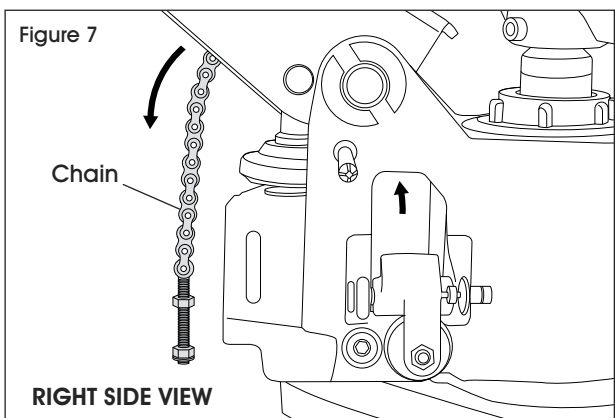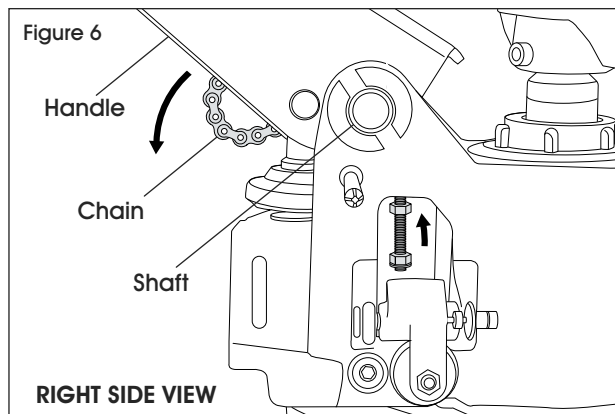


7. Use hammer to remove shaft. (See Figures 8-9)

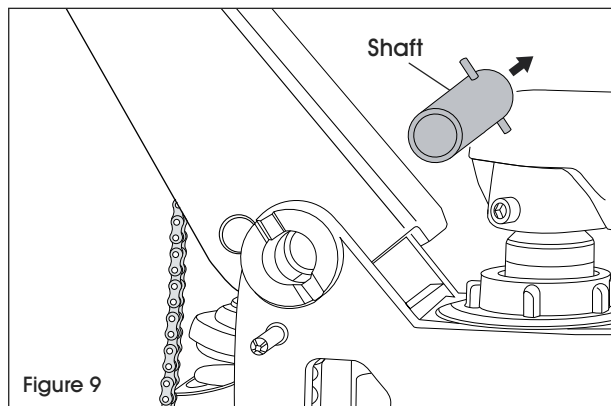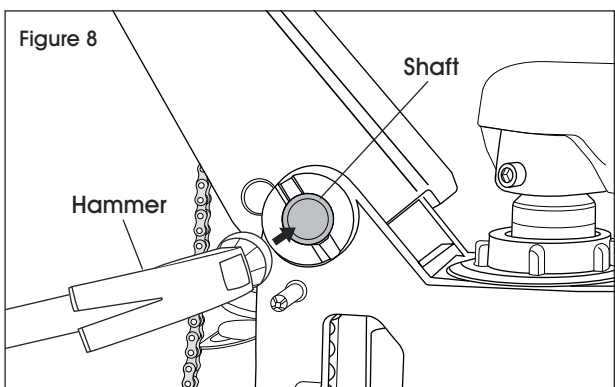

8. Lift old handle out. (See Figure 10)

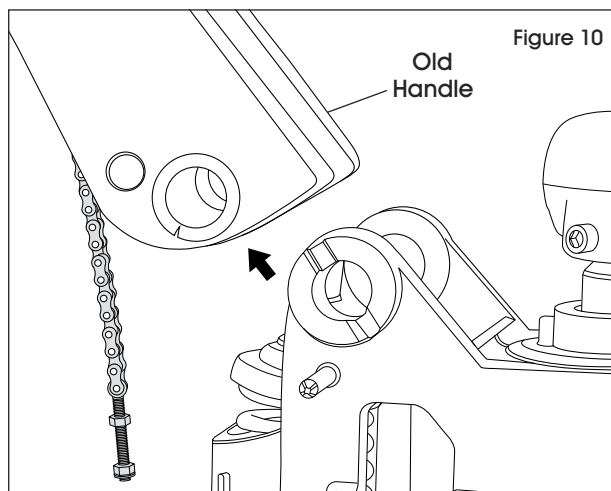


9. Insert new handle. (See Figure 11)

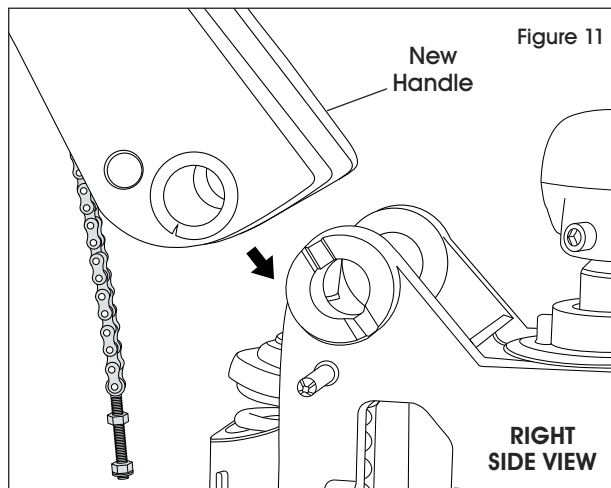


REPLACING HANDLE CONTINUED



10. Use hammer to tap shaft into place. (See Figure 12)

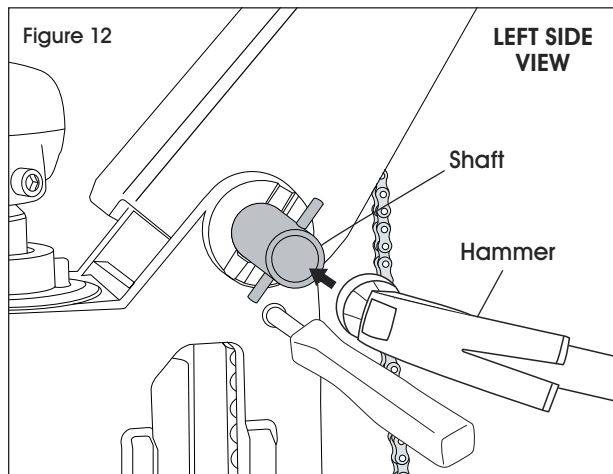


11. Tap spring pin into shaft to secure. (See Figure 13)

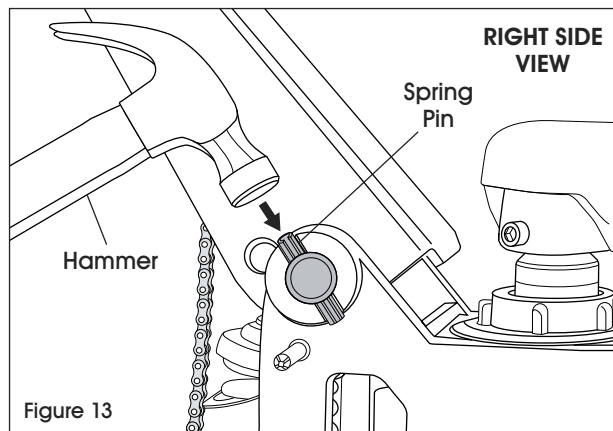


12. Thread bolt and chain over the shaft.
(See Figures 14-15)

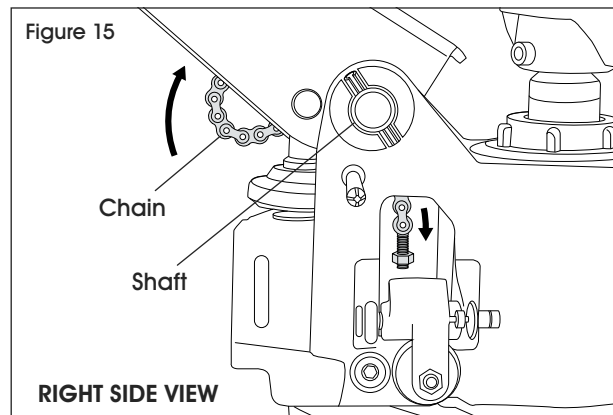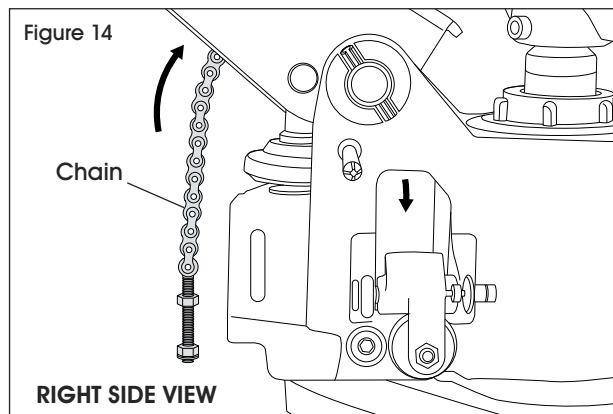


13. Remove screwdriver. (See Figure 17)

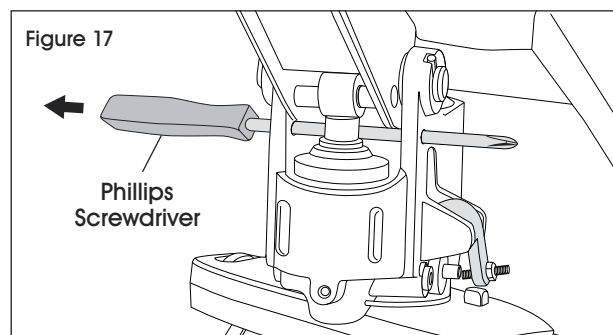

14. Pull lever up. (See Figure 18)

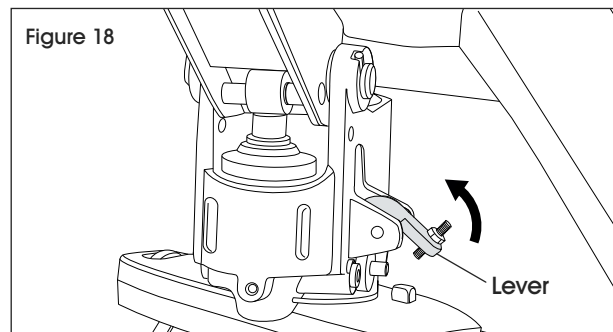


15. Insert bolt at end of chain into bracket.
(See Figure 16)

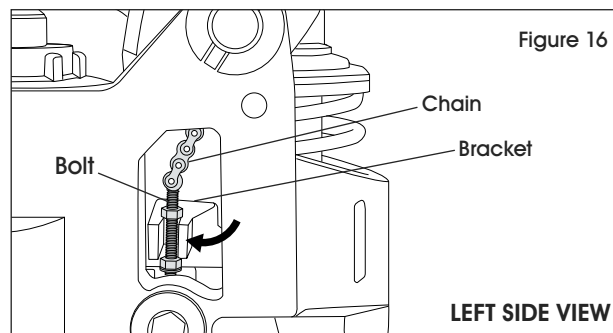

REPLACING HANDLE CONTINUED

16. Pull handle lever up. (See Figure 19)

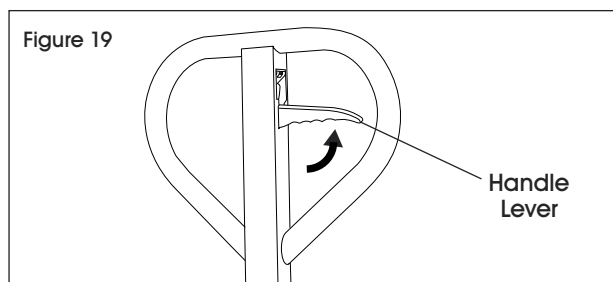

ULINE

1-800-295-5510
uline.com