


ULINE H-11640, H-11641 LIFTING MAGNET


1-800-295-5510
uline.com

Para Español, vea página 2.
Pour le français, consulter la page 3.

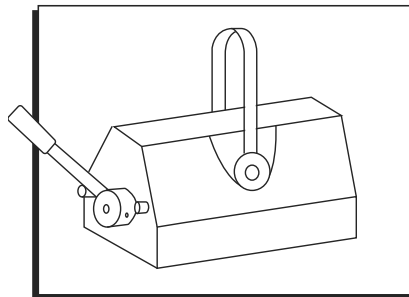

SPECIFICATIONS

PRODUCT SPECS

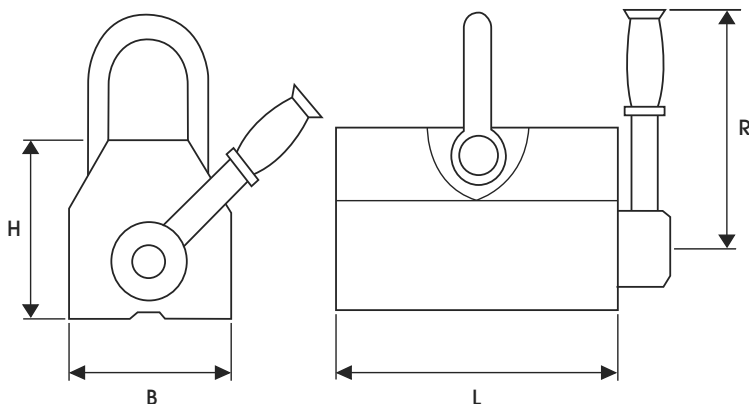

MODEL	RATED LIFTING CAPACITY		SHAPE SIZE				TEST MAX PULL OFF FORCE	WEIGHT
	STEEL PLATE	ROUND STEEL	L	B	H	R		
H-11640	660 lbs.	330 lbs.	6.5"	3.9"	3.9"	8.8"	2,315 lbs.	26 lbs.
H-11641	1,320 lbs.	660 lbs.	8.9"	4.6"	5.0"	10.1"	4,630 lbs.	54 lbs.


CAPACITY GUIDELINES

STEEL PLATE THICKNESS			LIFTING CAPACITY	
	mm	inch	H-11640	H-11641
T1	≤ 80	≤ 3.15	100%	100%
T2	60	2.36		
T3	55	2.16		
T4	50	1.97		
T5	45	1.77		
T6	40	1.57		
T7	35	1.38		
T8	30	1.18		
T9	25	0.98	90%	90%
T10	20	0.79		75%
T11	15	0.59		60%
T12	10	0.39		45%
T13	5	0.20		25%

ULINE H-11640, H-11641


IMÁN DE CARGA

800-295-5510
uline.mx

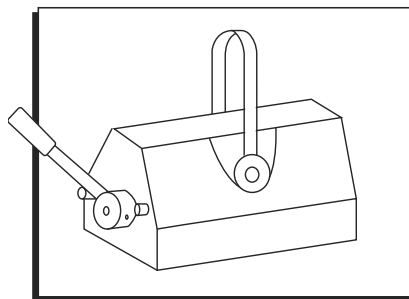

ESPECIFICACIONES

ESPECIFICACIONES DEL PRODUCTO

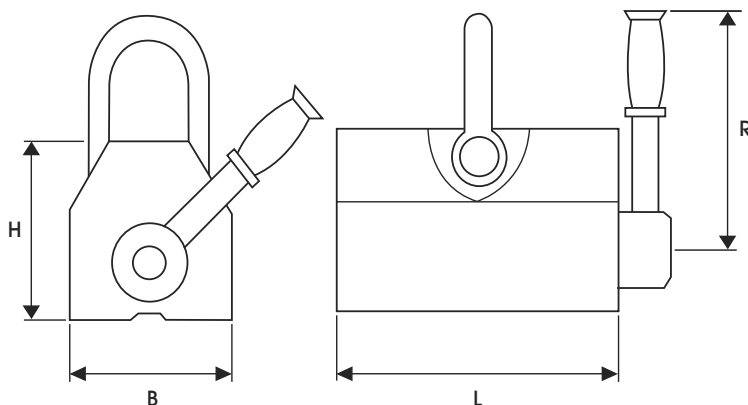

MODELO	CAPACIDAD DE ELEVACIÓN NOMINAL		TAMAÑO DE FORMA				PRUEBA DE FUERZA MÁXIMA DE ARRANQUE	PESO
	PLACA DE ACERO	ACERO REDONDO	L	B	H	R		
H-11640	299.4 kg (660 lbs.)	149.7 kg (330 lbs.)	16.5 cm (6.5")	9.9 cm (3.9")	9.9 cm (3.9")	22.4 cm (8.8")	1,050 kg (2,315 lbs.)	11.8 kg (26 lbs)
H-11641	598.7 kg (1320 lbs.)	299.4 kg (660 lbs.)	22.6 cm (8.9")	11.7 cm (4.6")	12.7 cm (5.0")	25.7 cm (10.1")	2,100 kg (4,630 lbs.)	24.5 kg (54 lbs)


LINEAMIENTOS DE CAPACIDAD

Grosor de la Placa de Acero			Capacidad de Elevación	
	mm	pulgadas	H-11640	H-11641
T1	≤ 80	≤ 3.15	100%	100%
T2	60	2.36		
T3	55	2.16		
T4	50	1.97		
T5	45	1.77		
T6	40	1.57		
T7	35	1.38		
T8	30	1.18		
T9	25	0.98		90%
T10	20	0.79	90%	75%
T11	15	0.59	70%	60%
T12	10	0.39	50%	45%
T13	5	0.20	30%	25%

ULINE H-11640, H-11641


AIMANT DE LEVAGE

1 800 295-5510
uline.ca

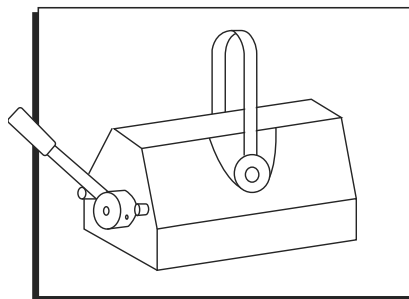

CARACTÉRISTIQUES

CARACTÉRISTIQUES DU PRODUIT

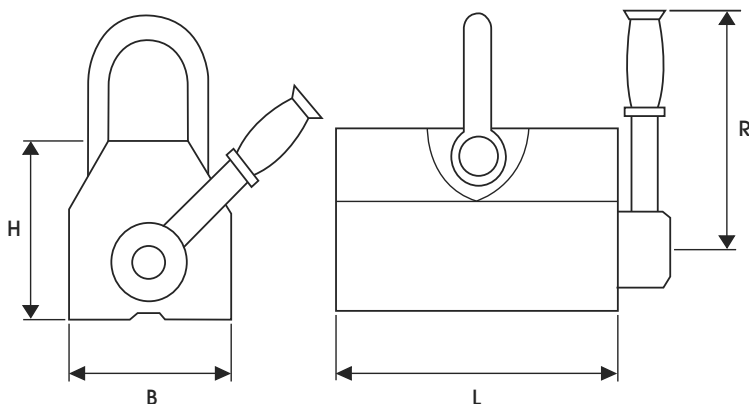

MODÈLE	CAPACITÉ DE LEVAGE NOMINALE		TAILLE DE LA FORME				FORCE DE TRACTION MAXIMALE	POIDS
	PLAQUE D'ACIER	ACIER ROND	L	B	H	R		
H-11640	299,4 kg (660 lbs.)	149,7 kg (330 lbs.)	16.5 cm (6,5 po)	9.9 cm (3,9 po)	9.9 cm (3,9 po)	22.4 cm (8,8 po)	1 050 kg (2 315 lbs.)	11,8 kg (25 lbs)
H-11641	598,7 kg (1 320 lbs.)	299,4 kg (660 lbs.)	22.6 cm (8,9 po)	11.7 cm (4,6 po)	12.7 cm (5,0 po)	25.7 cm (10,1 po)	2 100 kg (4 630 lbs.)	24,5 kg (52 lbs)

NORMES DE CAPACITÉ

Épaisseur de la plaque d'acier			Capacité de levage	
	mm	po	H-11640	H-11641
T1	≤ 80	≤ 3,15	100 %	100 %
T2	60	2,36		
T3	55	2,16		
T4	50	1,97		
T5	45	1,77		
T6	40	1,57		
T7	35	1,38		
T8	30	1,18		
T9	25	0,98	90 %	90 %
T10	20	0,79		75 %
T11	15	0,59		60 %
T12	10	0,39		45 %
T13	5	0,20		25 %