



H-3322S, H-3326S
H-4942S

1-800-295-5510
uline.com

6 x 2" HEAVY DUTY SWIVEL CASTER



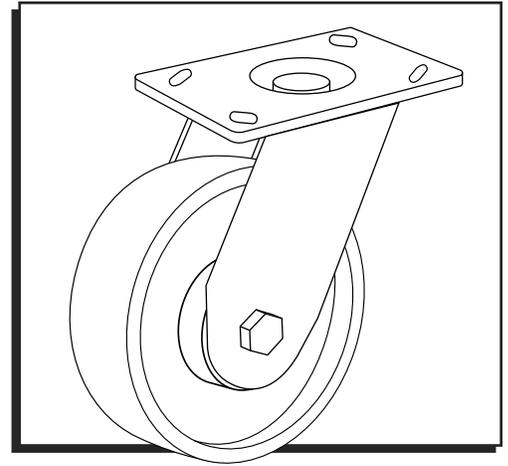



PLATE DIMENSIONS

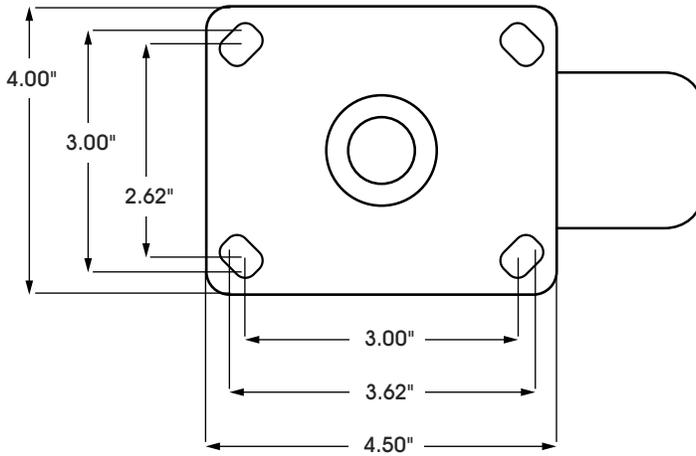

SIDE VIEW

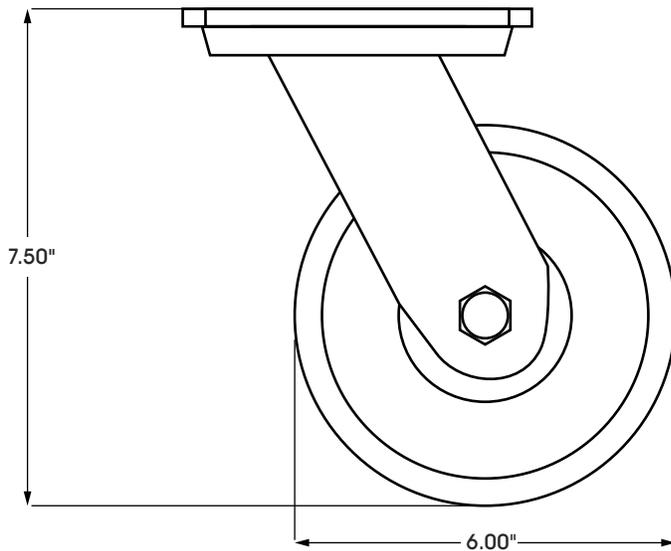

FRONT VIEW

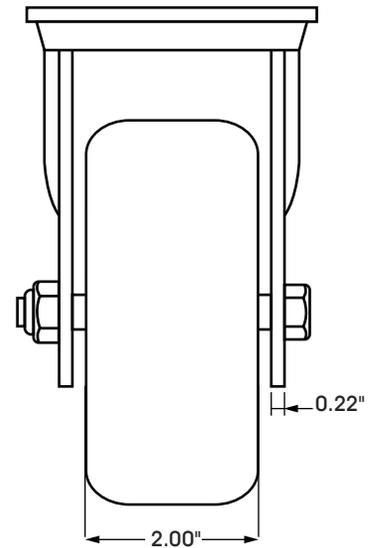

SPECIFICATIONS


MODEL #	MATERIAL	OPERATING TEMPERATURE	WHEEL HARDNESS	DESCRIPTION	CAPACITY	SIZE (DIAM. x W)
H-3322S	Polyolefin	-20 to 180°F	65 (Shore D Scale)	Swivel	700 lbs.	6 x 2"
H-3326S	Rubber	-40 to 158°F	90 (Shore A Scale)		410 lbs.	
H-4942S	Polyurethane	-40 to 175°F	95 (Shore A Scale)		800 lbs.	




H-3322S, H-3326S
H-4942S

800-295-5510
uline.mx


RUEDA DE USO PESADO – GIRATORIA, 6 x 2"

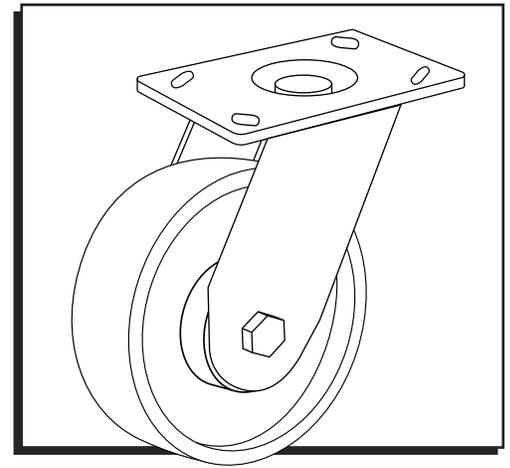


DIMENSIONES DE LA PLACA

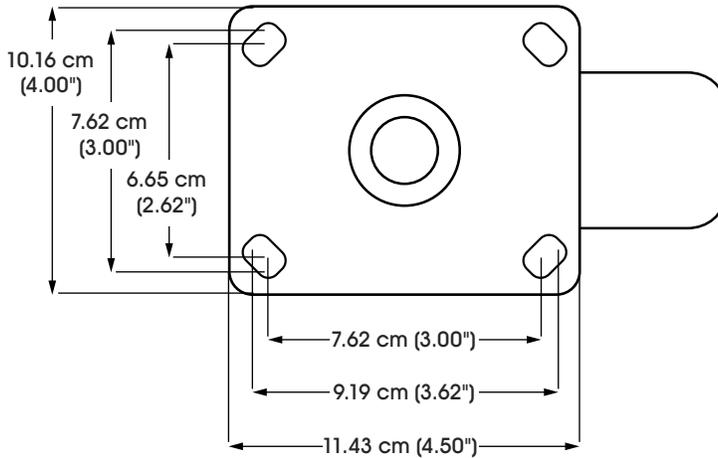

VISTA LATERAL

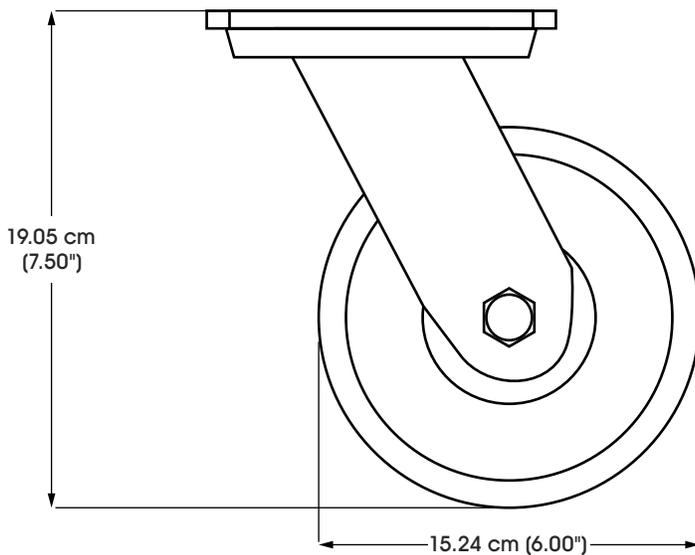


VISTA FRONTAL

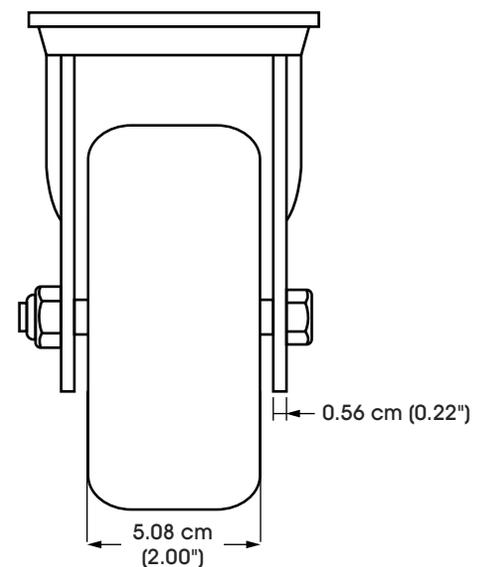


ESPECIFICACIONES

MODELO NO.	MATERIAL	TEMPERATURA DE FUNCIONAMIENTO	DUREZA DE LLANTA	DESCRIPCIÓN	CAPACIDAD	TAMAÑO (DIÁM. x ANCHO)
H-3322S	Poliiolefina	-29°C a 82°C (-20° a 180°F)	65 (Escala Shore D)	Giratoria	317 kg (700 lbs.)	15.24 x 5.08 cm (6 x 2")
H-3326S	Caucho	-40°C a 70°C (-40° a 158°F)	90 (Escala Shore A)		185 kg (410 lbs.)	
H-4942S	Poliuretano	-40°C a 79°C (-40° a 175°F)	95 (Escala Shore A)		362 kg (800 lbs.)	


**ROULETTE PIVOTANTE
ROBUSTE – 6 x 2 po**

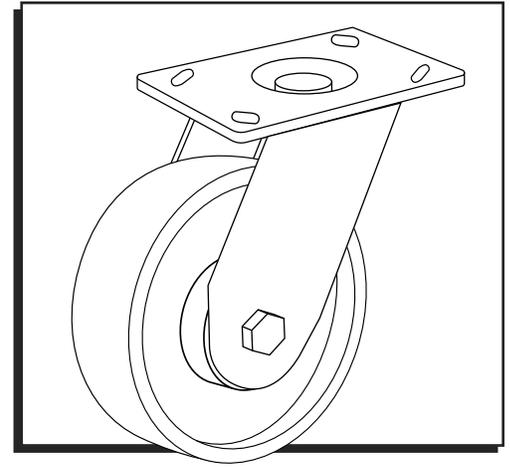


DIMENSIONS DE LA PLAQUE

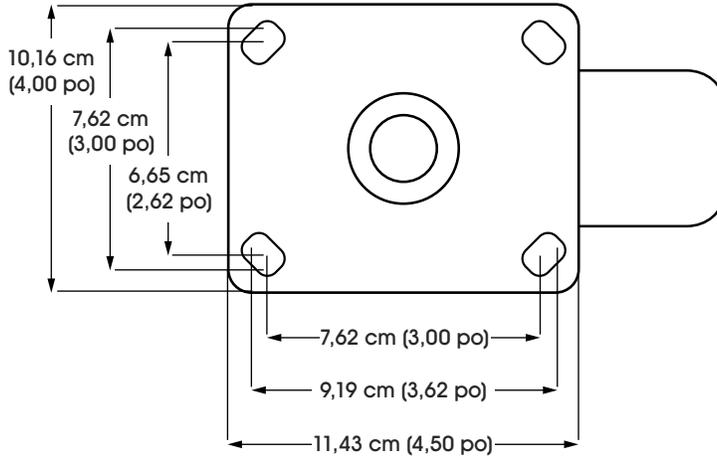

VUE LATÉRALE

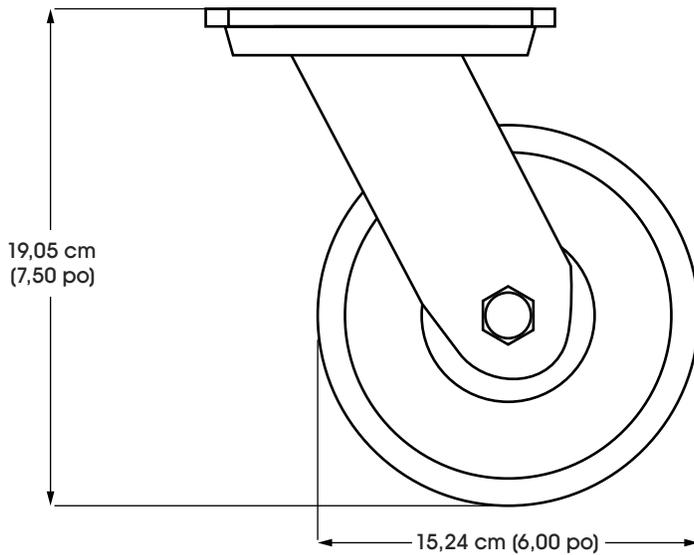

VUE AVANT

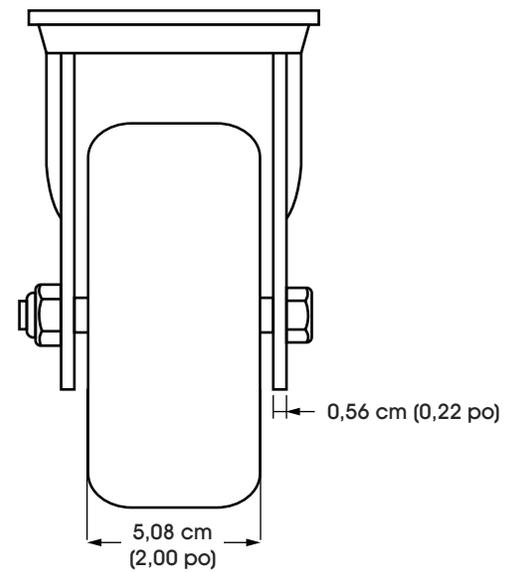

SPÉCIFICATIONS

N° DE MODÈLE	MATÉRIAU	TEMPÉRATURE DE FONCTIONNEMENT	DURETÉ DE LA ROUE	DESCRIPTION	CAPACITÉ	DIMENSIONS (diam. x larg.)
H-3322S	Polyoléfine	-29 °C à 82 °C (-20 °F à 180 °F)	65 (échelle Shore D)	Pivotant	317 kg (700 lb)	15,24 x 5,08 cm (6 x 2 po)
H-3326S	Caoutchouc	-40 °C à 70 °C (-40 °F à 158 °F)	90 (échelle Shore A)		185 kg (410 lb)	
H-4942S	Polyuréthane	-40 °C à 79 °C (-40 °F à 175 °F)	95 (échelle Shore A)		362 kg (800 lb)	