



H-3323R, H-3327R  
H-4943R

1-800-295-5510  
uline.com

# 8 x 2" HEAVY DUTY RIGID CASTER



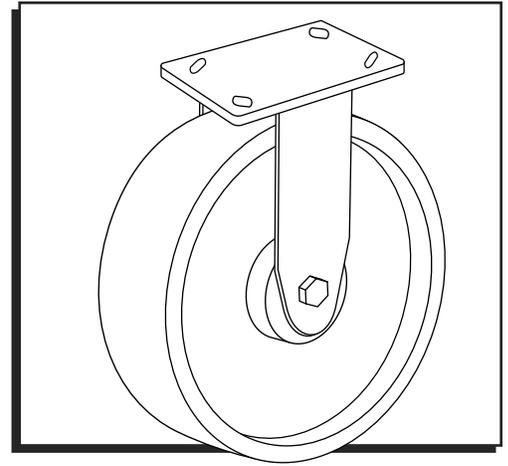



PLATE DIMENSIONS

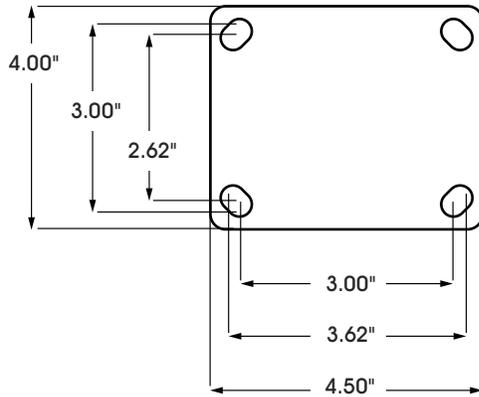

SIDE VIEW

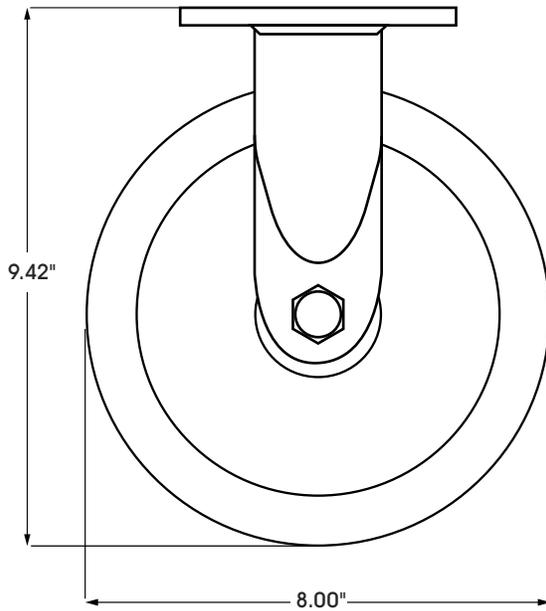

FRONT VIEW

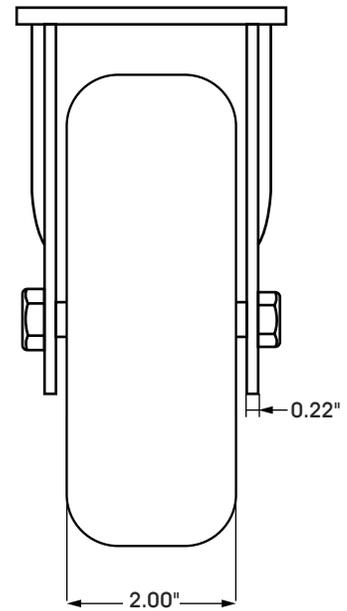

## SPECIFICATIONS

MODEL #	MATERIAL	OPERATING TEMPERATURE	WHEEL HARDNESS	DESCRIPTION	CAPACITY	SIZE (DIAM. x W)
H-3323R	Polyolefin	-20 to 180°F	65 (Shore D Scale)	Rigid	900 lbs.	8 x 2"
H-3327R	Rubber	-40 to 158°F	85 (Shore A Scale)		500 lbs.	
H-4943R	Polyurethane	-40 to 175°F	95 (Shore A Scale)		1,000 lbs.	





H-3323R, H-3327R  
H-4943R


800-295-5510  
uline.mx

# RUEDA DE USO PESADO – RÍGIDA, 8 x 2"


## DIMENSIONES DE LA PLACA

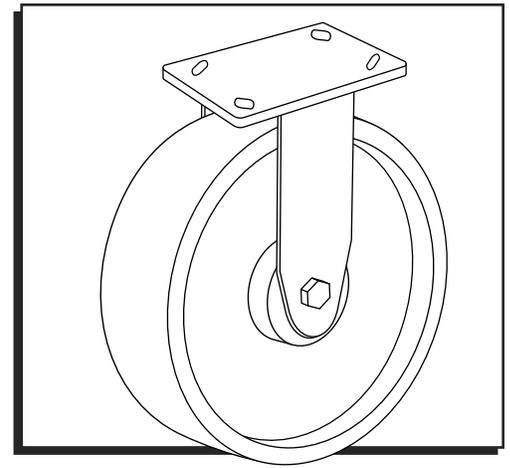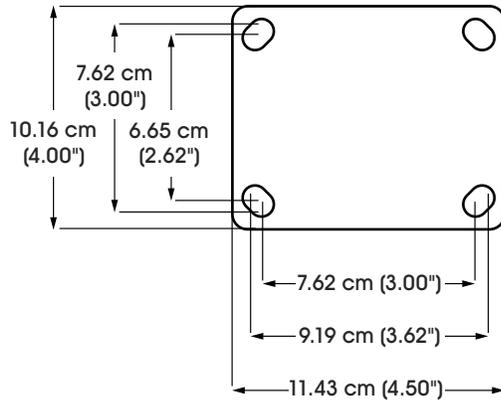

## VISTA LATERAL

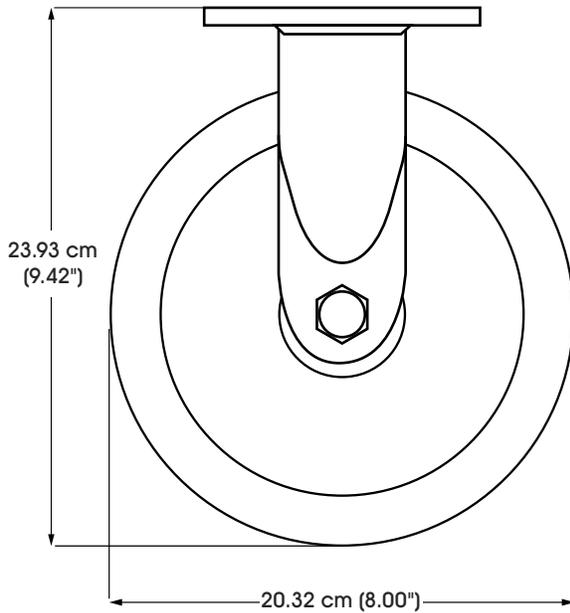


## VISTA FRONTAL

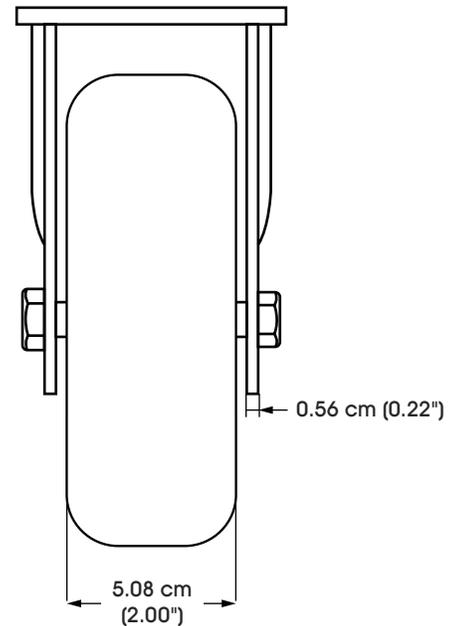


## ESPECIFICACIONES

MODELO NO.	MATERIAL	TEMPERATURA DE FUNCIONAMIENTO	DUREZA DE LLANTA	DESCRIPCIÓN	CAPACIDAD	TAMAÑO (DIÁM. x ANCHO)
H-3323R	Polioléfina	-29°C a 82°C (-20° a 180°F)	65 (Escala Shore D)	Rígida	408 kg (900 lbs.)	20.32 x 5.08 cm (8 x 2")
H-3327R	Caucho	-40°C a 70°C (-40° a 158°F)	85 (Escala Shore A)		226 kg (500 lbs.)	
H-4943R	Poliuretano	-40°C a 79°C (-40° a 175°F)	95 (Escala Shore A)		453 kg (1,000 lbs.)	


**ROULETTE ROBUSTE  
FIXE – 8 x 2 po**

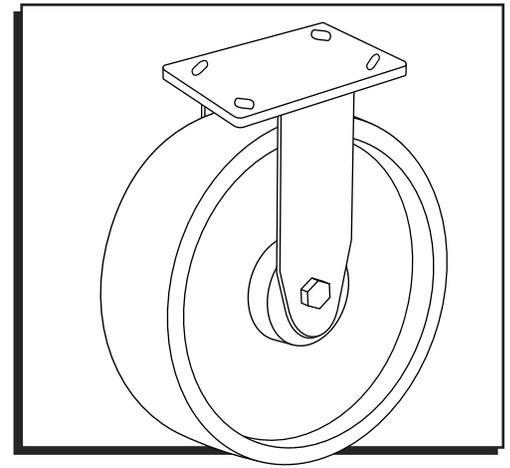


DIMENSIONS DE LA PLAQUE

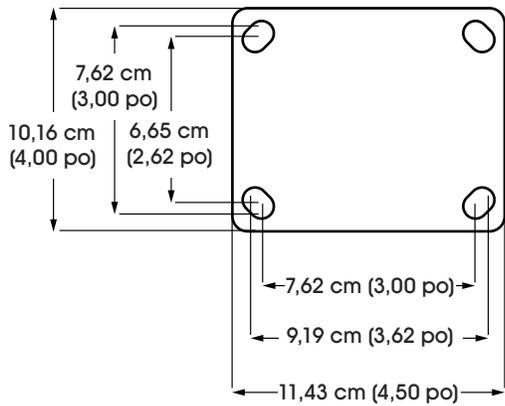

VUE LATÉRALE

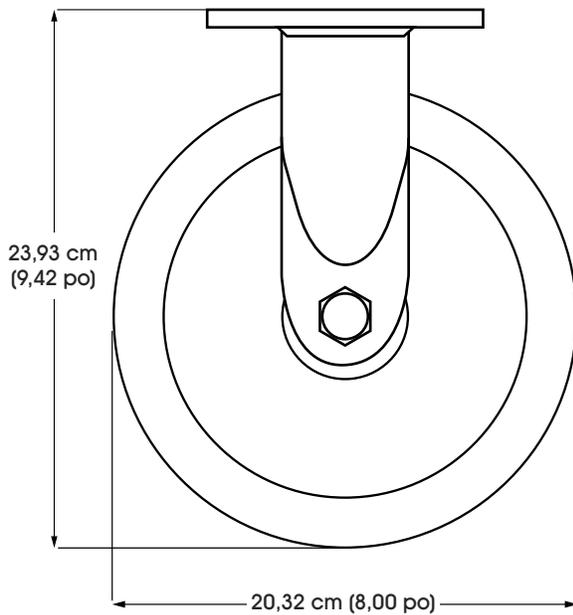

VUE AVANT

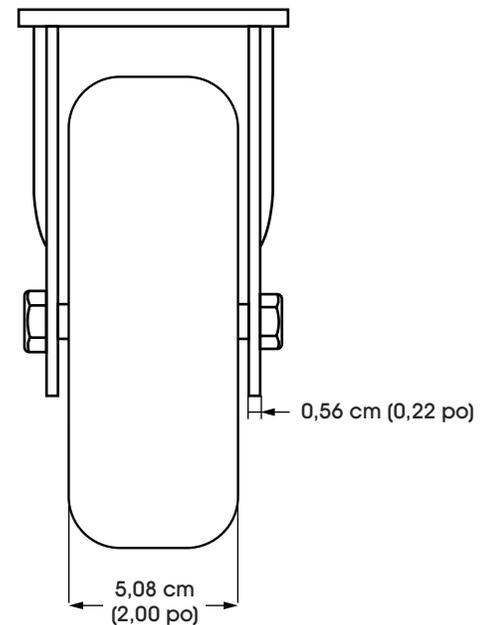

**SPÉCIFICATIONS**

N° DE MODÈLE	MATÉRIAU	TEMPÉRATURE DE FONCTIONNEMENT	DURETÉ DE LA ROUE	DESCRIPTION	CAPACITÉ	DIMENSIONS (diam. x larg.)
H-3323R	Polyoléfine	-29 °C à 82 °C (-20 °F à 180 °F)	65 (échelle Shore D)	Fixe	408 kg (900 lb)	20,32 x 5,08 cm (8 x 2 po)
H-3327R	Caoutchouc	-40 °C à 70 °C (-40 °F à 158 °F)	85 (échelle Shore A)		226 kg (500 lb)	
H-4943R	Polyuréthane	-40 °C à 79 °C (-40 °F à 175 °F)	95 (échelle Shore A)		453 kg (1 000 lb)	