


ULINE H-3859


BEST® GRAVITY CONVEYOR – 24" x 36'

1-800-295-5510
 uline.com

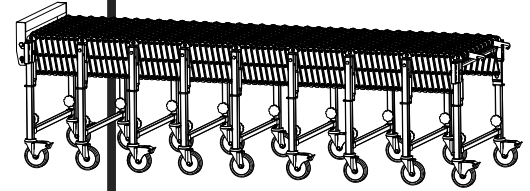


COMPRESSED VIEW

SIDE VIEW

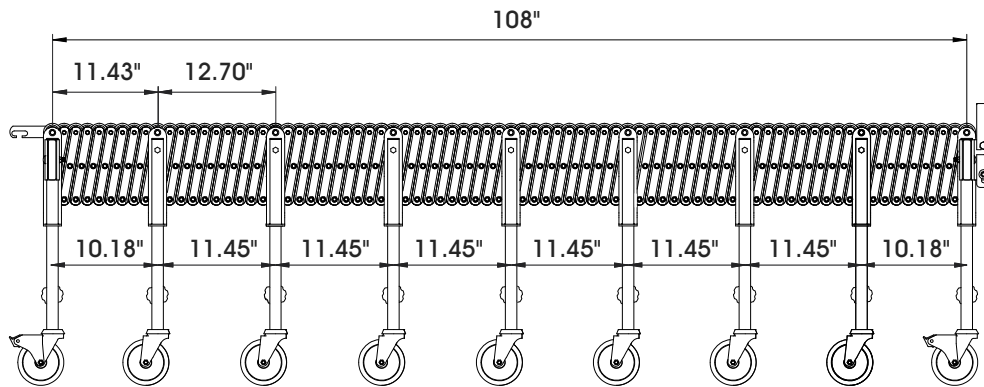

END VIEW

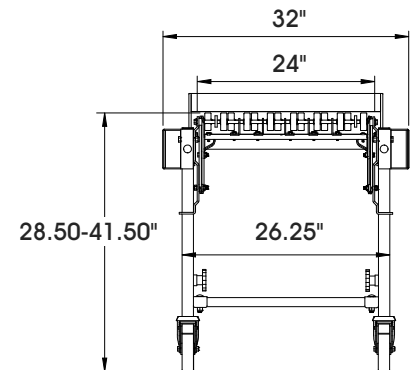

SPECIFICATIONS

LENGTH		HEIGHT		WIDTH BETWEEN FRAME
COMPRESSED	EXTENDED	LEGS COLLAPSED	LEGS EXTENDED	
9'	36'	28.50"	41.50"	24"

ULINE H-3859

**BEST® GRAVITY CONVEYOR –
24" x 36'**

1-800-295-5510



uline.com

EXPANDED VIEW

SIDE VIEW



TOP VIEW

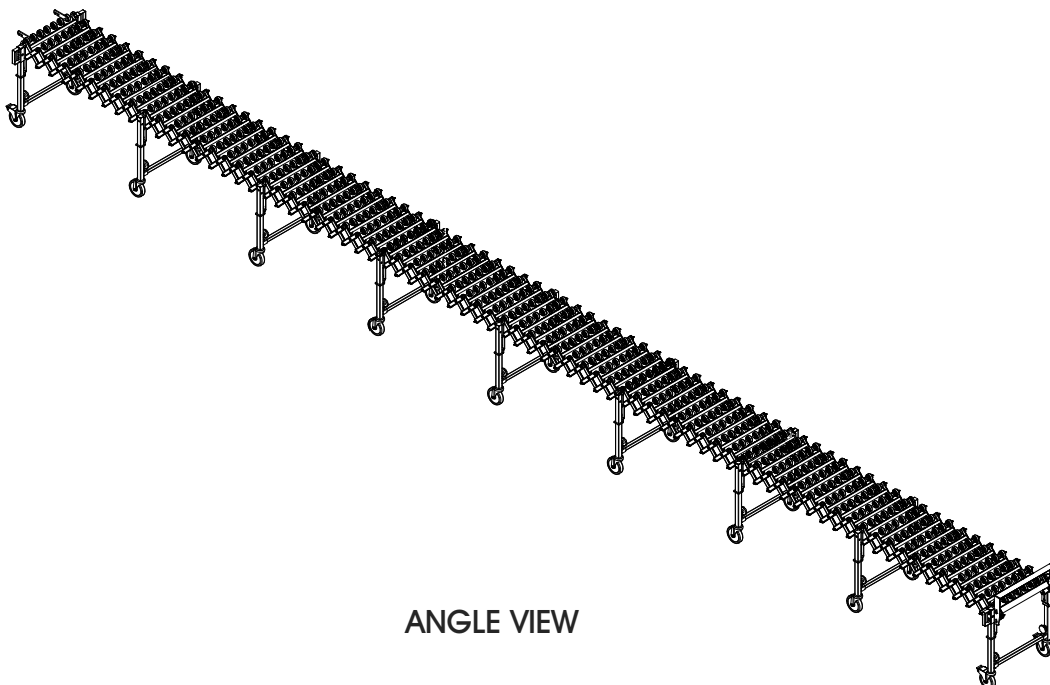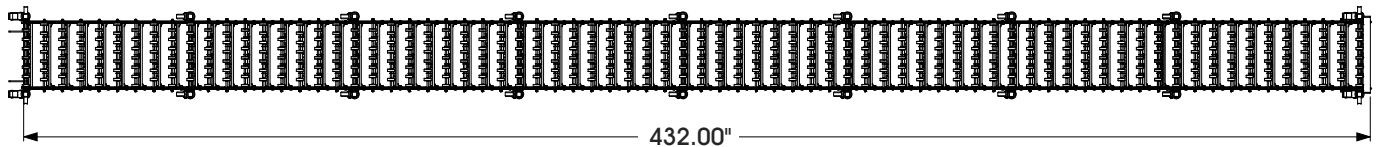


ANGLE VIEW

ULINE H-3859


**BEST® BANDA
TRANSPORTADORA POR
GRAVEDAD – 24" x 36'**

800-295-5510
uline.mx

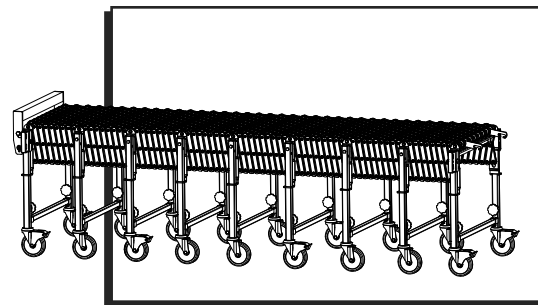


VISTA COMPRIMIDA

VISTA LATERAL

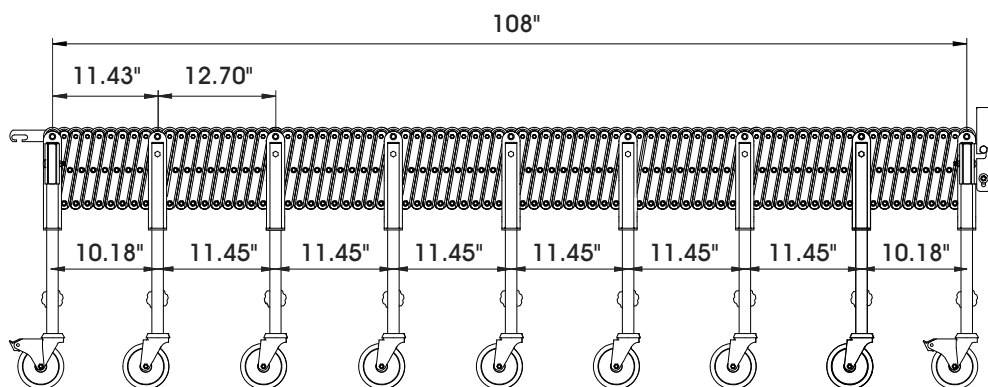

VISTA DEL EXTREMO

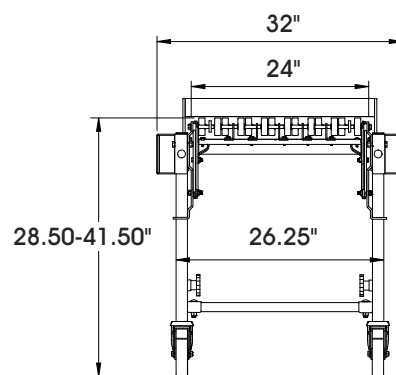

ESPECIFICACIONES

LARGO		ALTURA		ANCHO ENTRE ARMAZÓN
COMPRIMIDA	EXTENDIDA	PATAS PLEGADAS	PATAS EXTENDIDAS	
9'	36'	28.50"	41.50"	24"

ULINE H-3859

800-295-5510

uline.mx



**BEST® BANDA
TRANSPORTADORA POR
GRAVEDAD – 24" x 36'**

VISTA EXPANDIDA

VISTA LATERAL



VISTA SUPERIOR

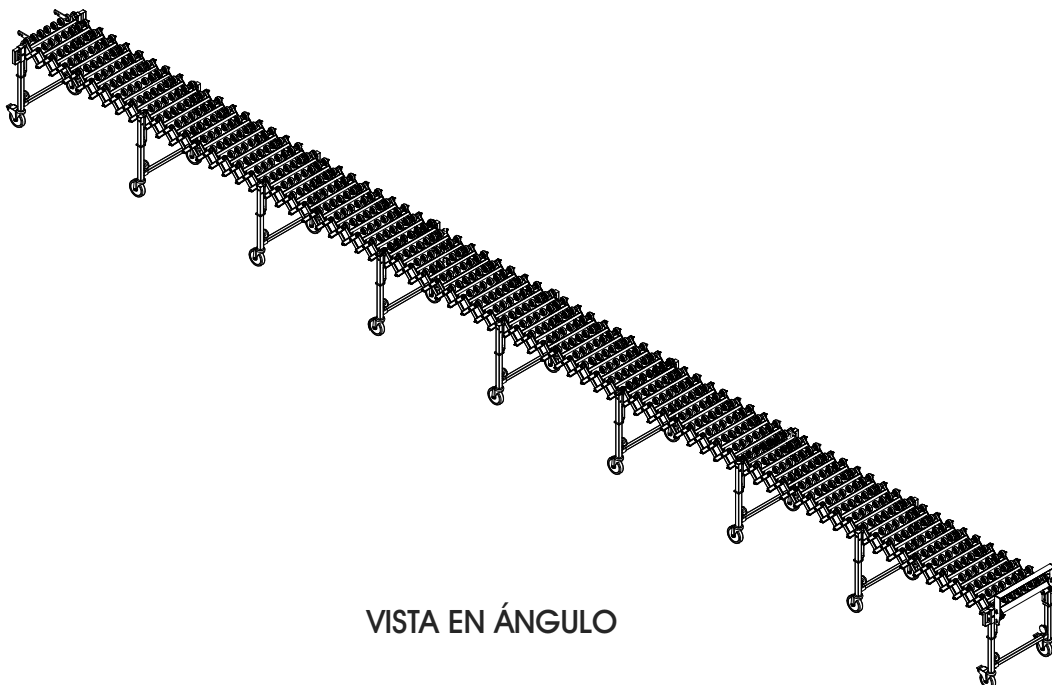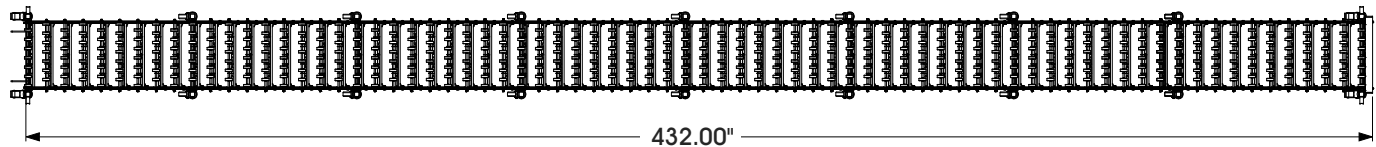


VISTA EN ÁNGULO

ULINE H-3859


**BEST^{MD} – CONVOYEUR PAR
GRAVITÉ – 24 po x 36 pi**

1 800 295-5510
uline.ca

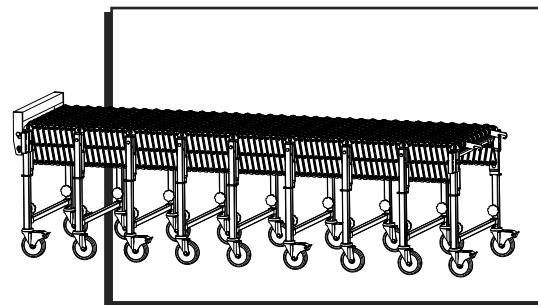


VUE DU CONVOYEUR COMPRESSÉ

VUE LATÉRALE

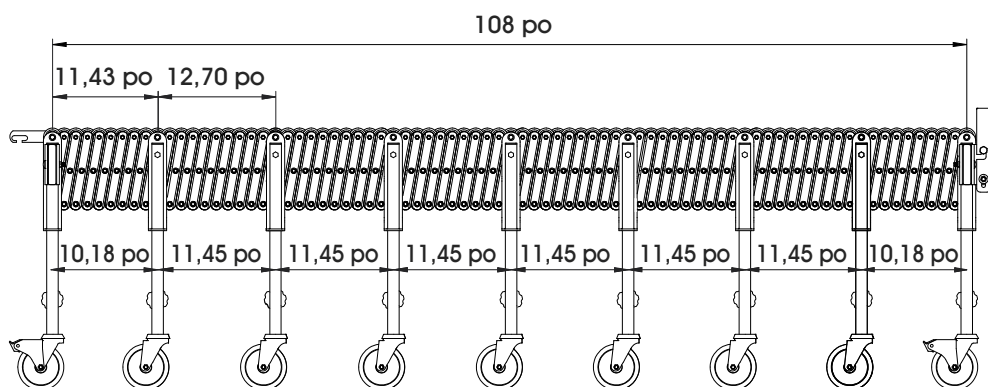

VUE D'EXTRÉMITÉ

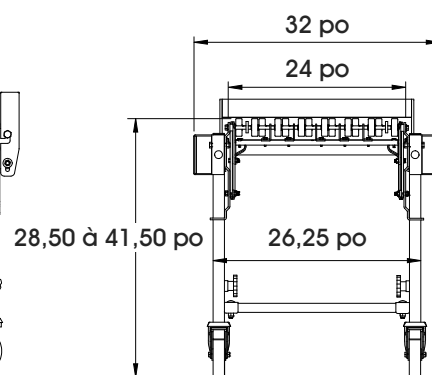

CARACTÉRISTIQUES

LONGUEUR		HAUTEUR		LARGEUR À L'INTÉRIEUR DU CADRE
COMPRESSÉ	DÉPLOYÉ	PIEDS REPLIÉS	PIEDS DÉPLIÉS	
9 pi	36 pi	28,50 po	41,50 po	24 po

ULINE H-3859

**BEST^{MD} – CONVOYEUR PAR
GRAVITÉ – 24 po x 36 pi**

1 800 295-5510



uline.ca

VUE DU CONVOYEUR DÉPLOYÉ

VUE LATÉRALE



VUE DU DESSUS

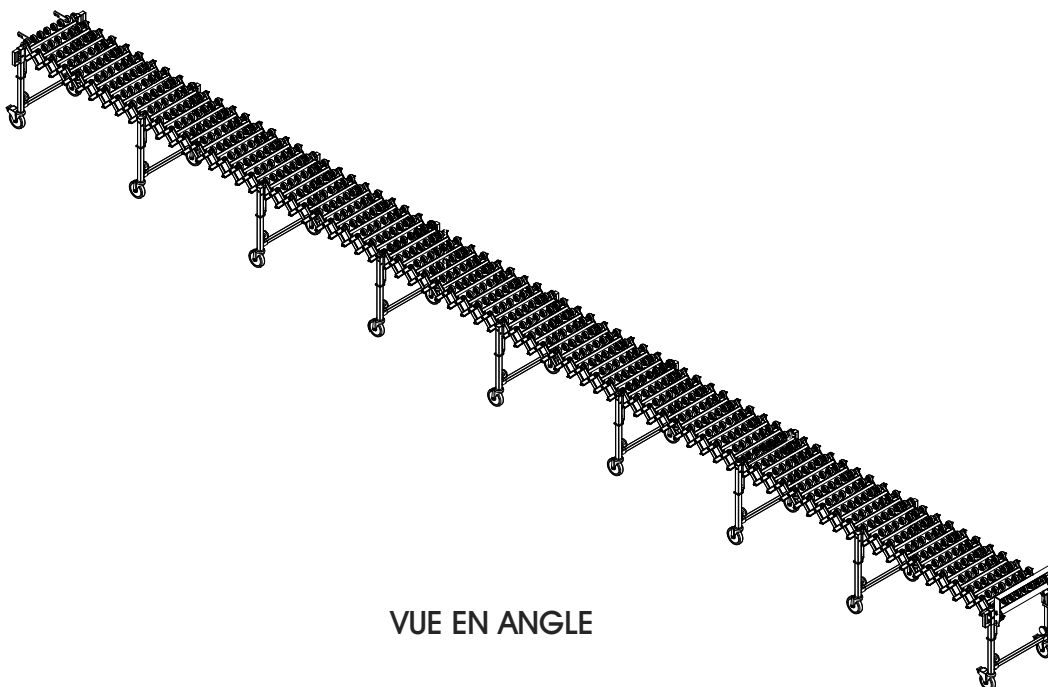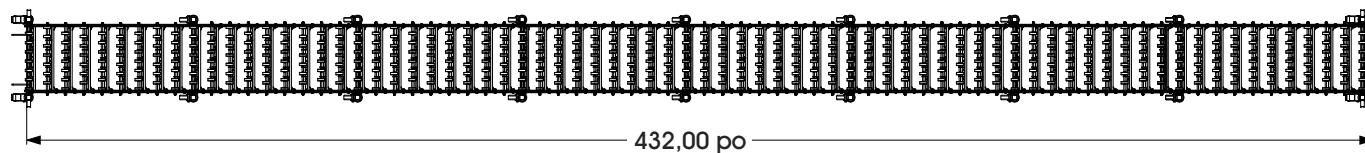

VUE EN ANGLE