


ULINE H-5535R, H-5537R
H-5539R
4 x 1¼" RIGID CASTER


1-800-295-5510
uline.com

Para Español, vea página 2.
Pour le français, consulter la page 3.


PLATE DIMENSIONS

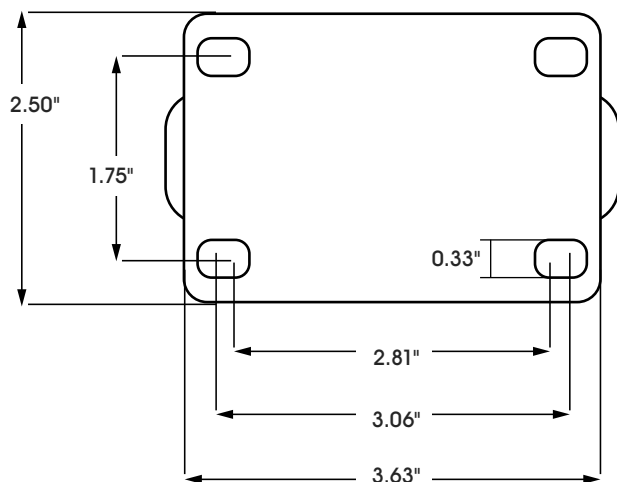

SIDE VIEW

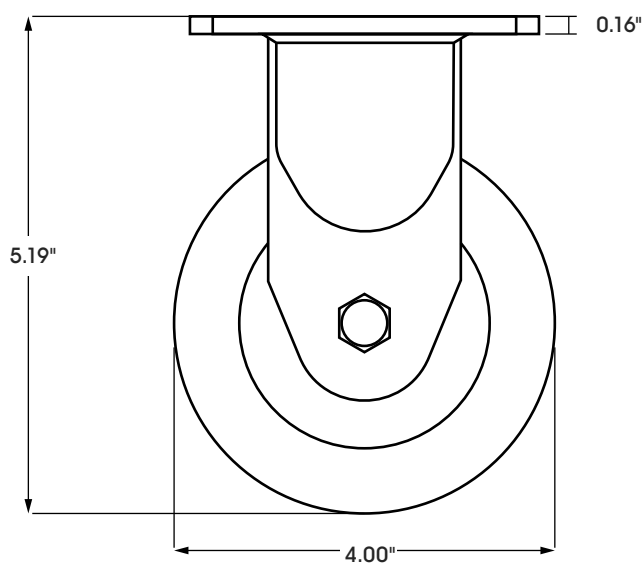



FRONT VIEW

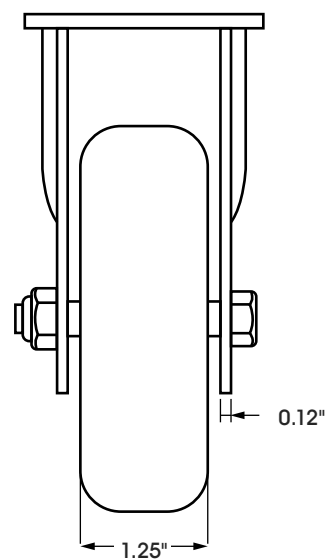


SPECIFICATIONS

MODEL #	MATERIAL	OPERATING TEMPERATURE	WHEEL HARDNESS	DESCRIPTION	CAPACITY	SIZE (DIAM. x W)
H-5535R	Polyolefin	-20° to 180°F	65 (Shore D Scale)	Rigid	275 lbs.	4 x 1.25"
H-5537R	Rubber	-40° to 175°F	75 (Shore A Scale)			
H-5539R	Polyurethane	-40° to 175°F	95 (Shore A Scale)			


DIMENSIONES DE LA PLACA

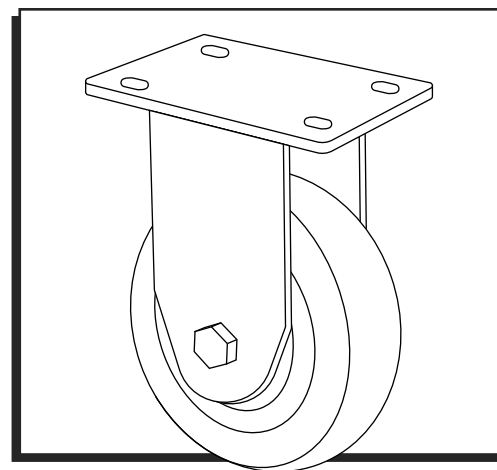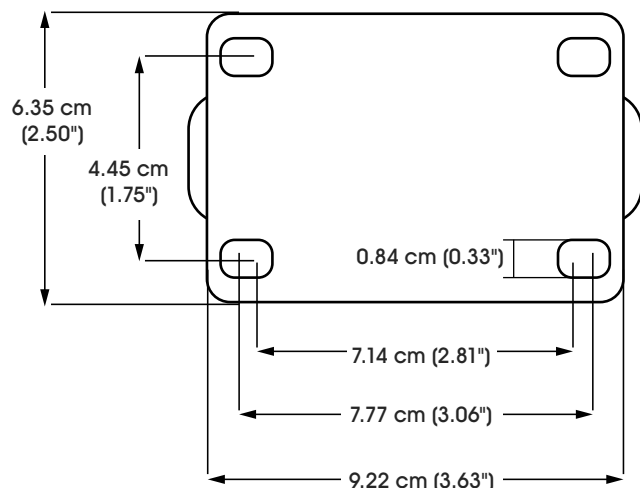

VISTA LATERAL

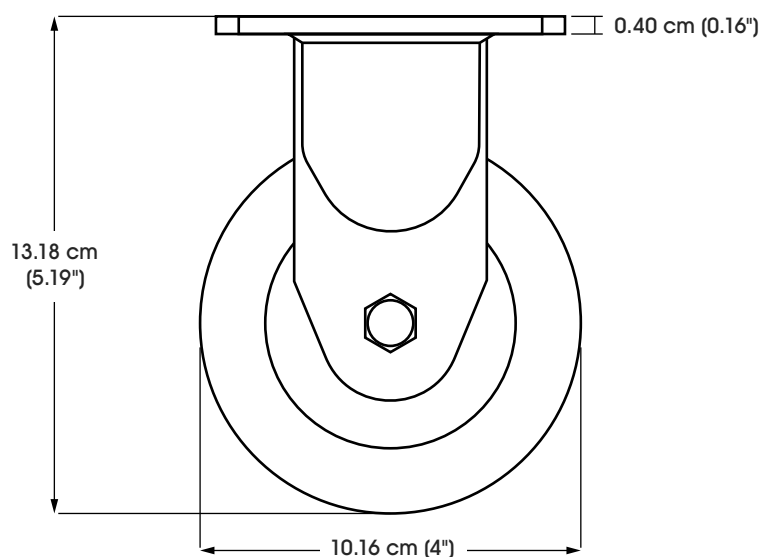

VISTA FRONTAL

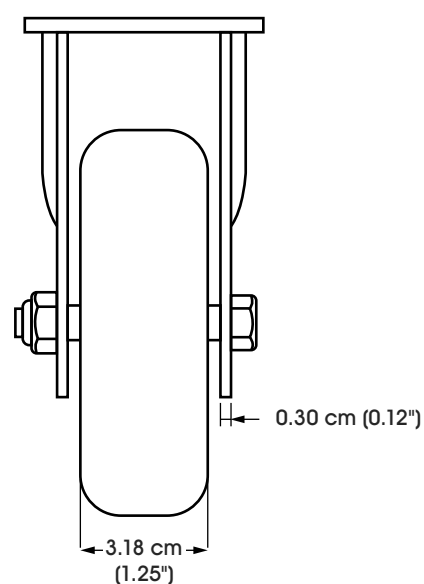


ESPECIFICACIONES


MODELO NO.	MATERIAL	TEMPERATURA DE FUNCIONAMIENTO	DUREZA DE LLANTA	DESCRIPCIÓN	CAPACIDAD	TAMAÑO (DIÁM. x ANCHO)
H-5535R	Poliolefina	-29°C a 82°C (-20° a 180°F)	65 (Escala Shore D)	Rígida	275 lbs.	10.16 x 3.18 cm (4 x 1.25")
H-5537R	Caucho	-40°C a 79°C (-40° a 175°F)	75 (Escala Shore A)			
H-5539R	Poliuretano	-40°C a 79°C (-40° a 175°F)	95 (Escala Shore A)			

ULINE H-5535R, H-5537R
H-5539R
ROULETTE FIXE – 4 x 1 ¼ po


1 800 295-5510
uline.ca

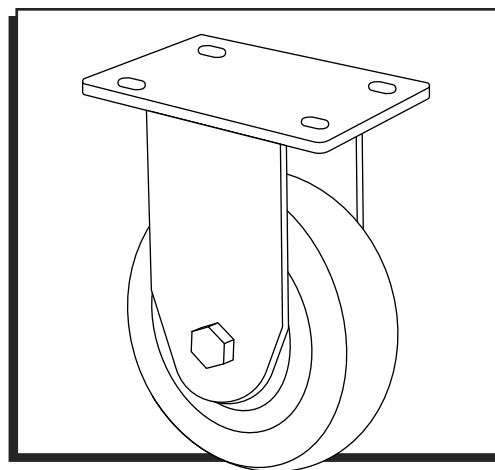


DIMENSIONS DE LA PLAQUE

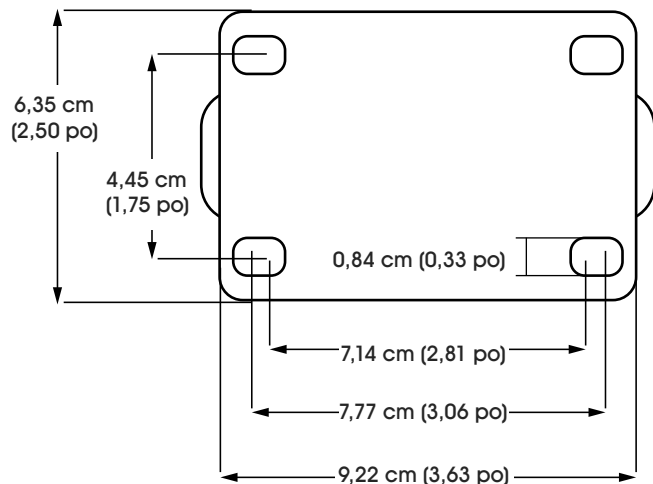

VUE LATÉRALE

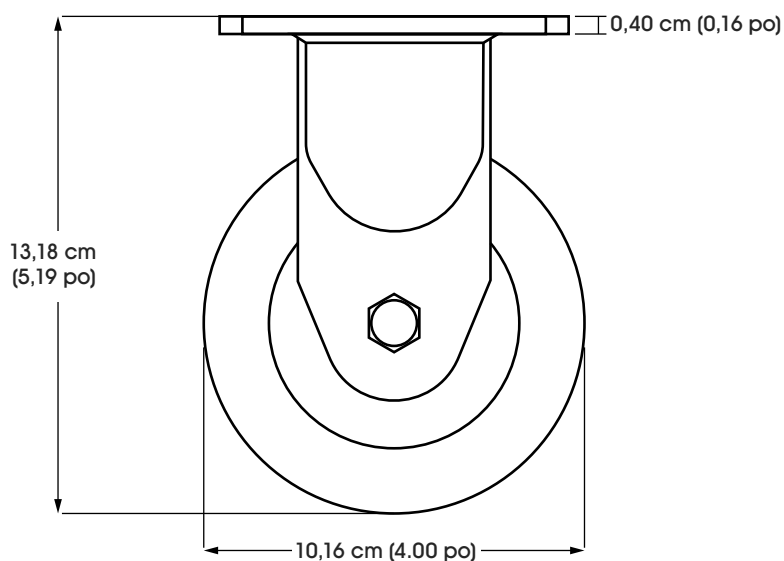

VUE AVANT

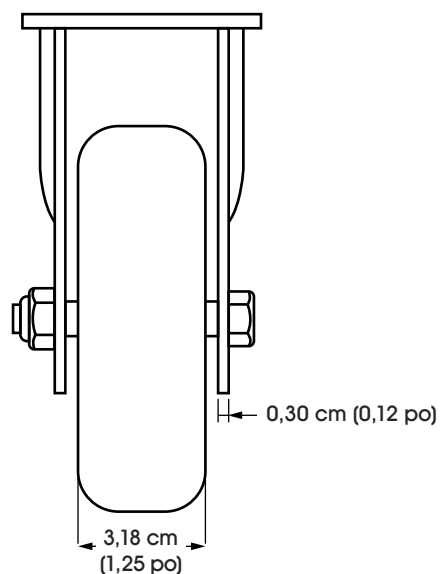

SPÉCIFICATIONS

N° DE MODÈLE	MATÉRIAU	TEMPÉRATURE DE FONCTIONNEMENT	DURETÉ DE LA ROUE	DESCRIPTION	CAPACITÉ	DIMENSIONS (DIAM. x LARG.)
H-5535R	Polyoléfine	-29 °C à 82 °C (-20° à 180 °F)	65 (échelle Shore D)	Fixe	275 lb	10,16 x 3,18 cm (4 x 1,25 po)
H-5537R	Caoutchouc	-40 °C à 79 °C (-40° à 175 °F)	75 (échelle Shore A)			
H-5539R	Polyuréthane	-40 °C à 79 °C (-40° à 175 °F)	95 (échelle Shore A)			