
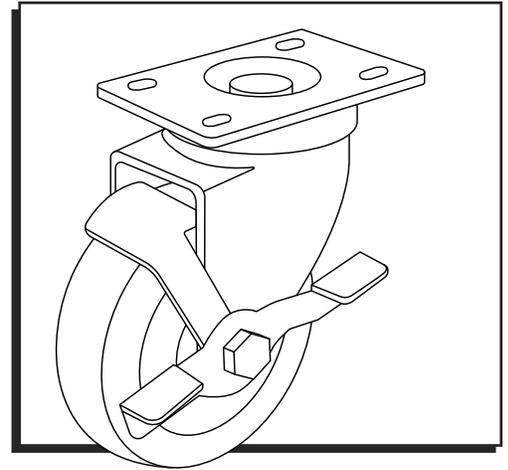


ULINE H-5535SWB, H-5537SWB
H-5539SWB


1-800-295-5510
uline.com

4 x 1 1/4" SWIVEL CASTER WITH BRAKE


PLATE DIMENSIONS

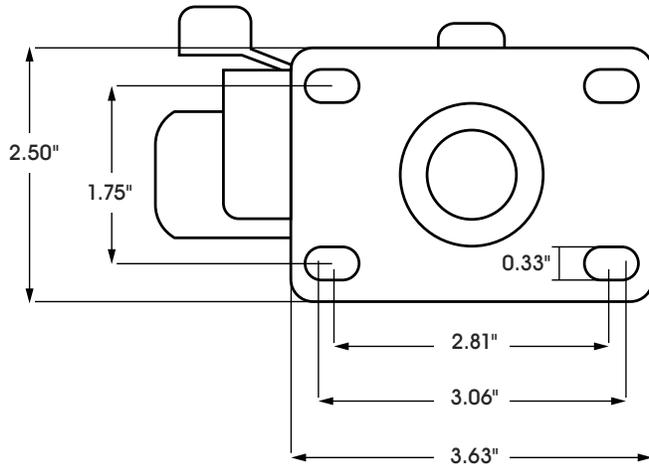

SIDE VIEW

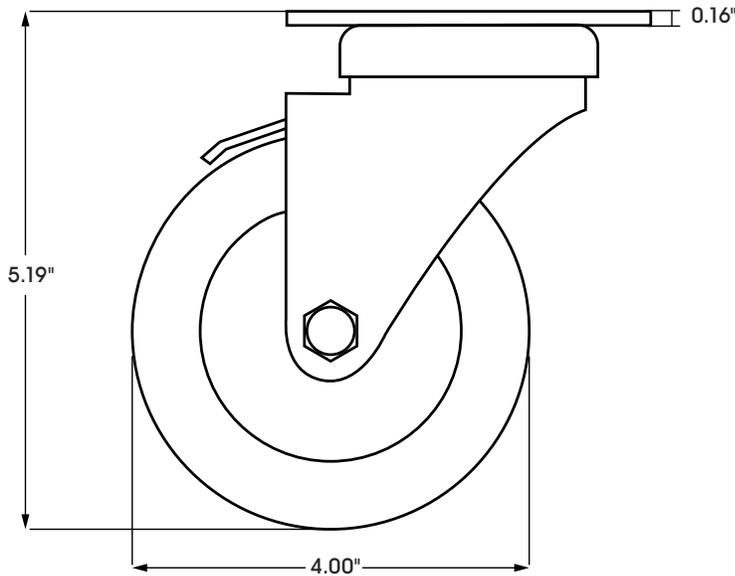

FRONT VIEW


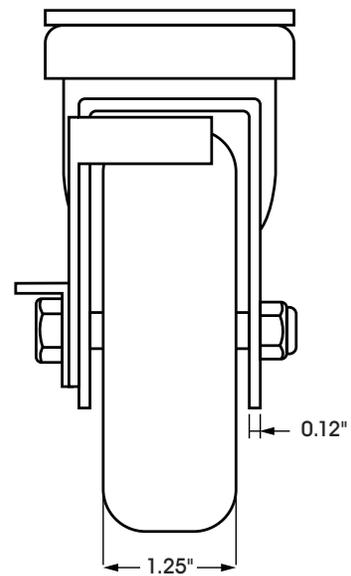


SPECIFICATIONS


MODEL #	MATERIAL	OPERATING TEMPERATURE	WHEEL HARDNESS	DESCRIPTION	CAPACITY	SIZE (DIAM. x W)
H-5535SWB	Polyolefin	-20° to 180°F	65 (Shore D Scale)	Swivel with Brake	275 lbs.	4 x 1.25"
H-5537SWB	Rubber	-40° to 175°F	75 (Shore A Scale)			
H-5539SWB	Polyurethane	-40° to 175°F	95 (Shore A Scale)			

**RUEDA GIRATORIA CON
FRENO – 4 x 1¼"**


DIMENSIONES DE LA PLACA

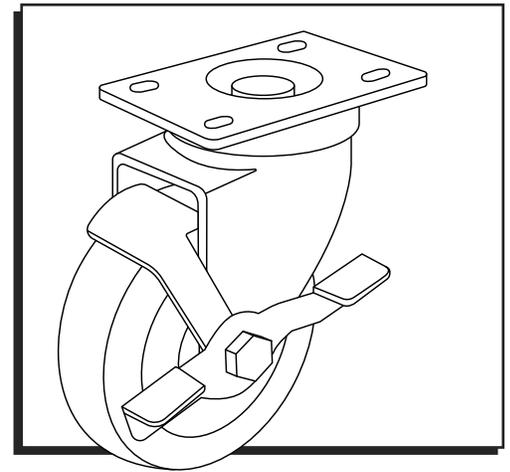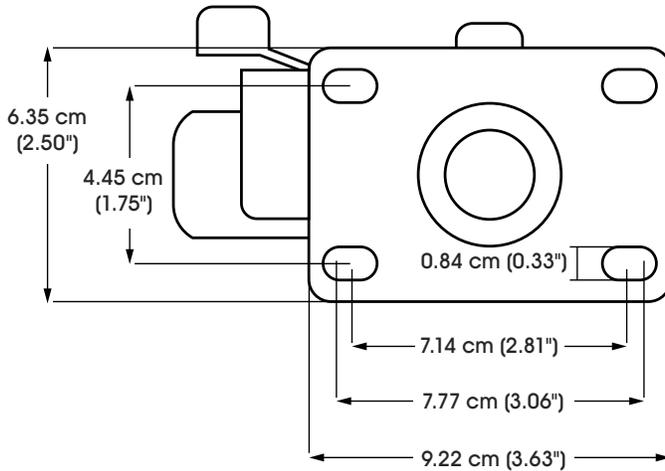

VISTA LATERAL

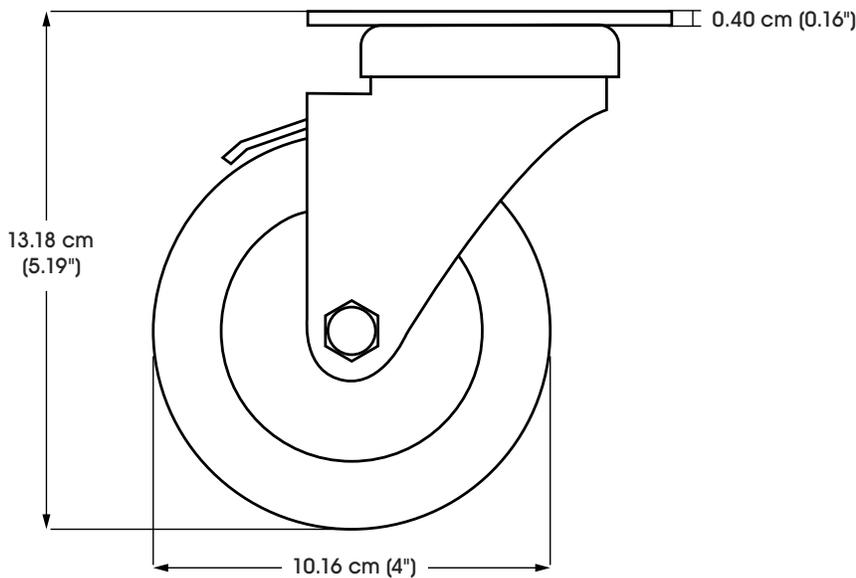

VISTA FRONTAL


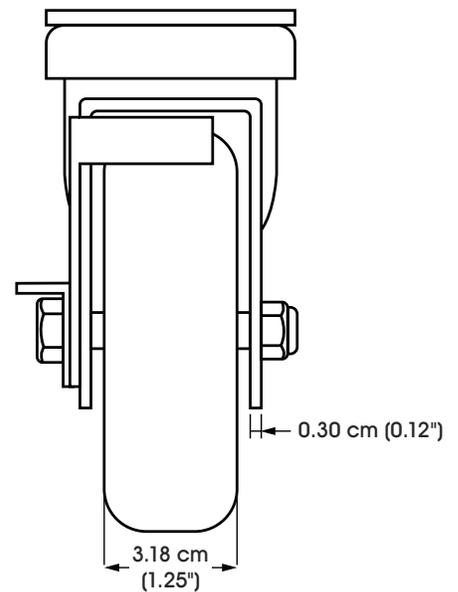


ESPECIFICACIONES


MODELO NO.	MATERIAL	TEMPERATURA DE FUNCIONAMIENTO	DUREZA DE LLANTA	DESCRIPCIÓN	CAPACIDAD	TAMAÑO (DIÁM. x ANCHO)
H-5535SWB	Poliiolefina	-29°C a 82°C (-20° a 180°F)	65 (Escala Shore D)	Giratoria con Freno	124 kg (275 lbs.)	10.16 x 3.18 cm (4 x 1.25")
H-5537SWB	Caucho	-40°C a 79°C (-40° a 175°F)	75 (Escala Shore A)			
H-5539SWB	Poliuretano	-40°C a 79°C (-40° a 175°F)	95 (Escala Shore A)			

**ROULETTE PIVOTANTE
AVEC FREIN – 4 x 1 ¼ po**


DIMENSIONS DE LA PLAQUE

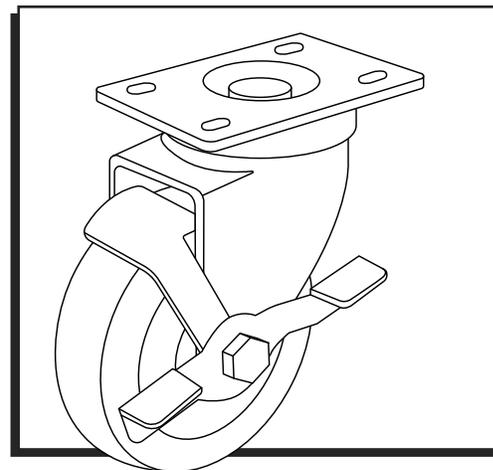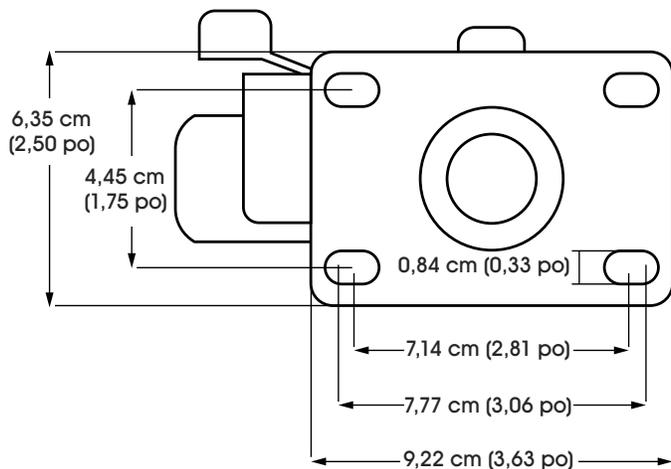

VUE LATÉRALE

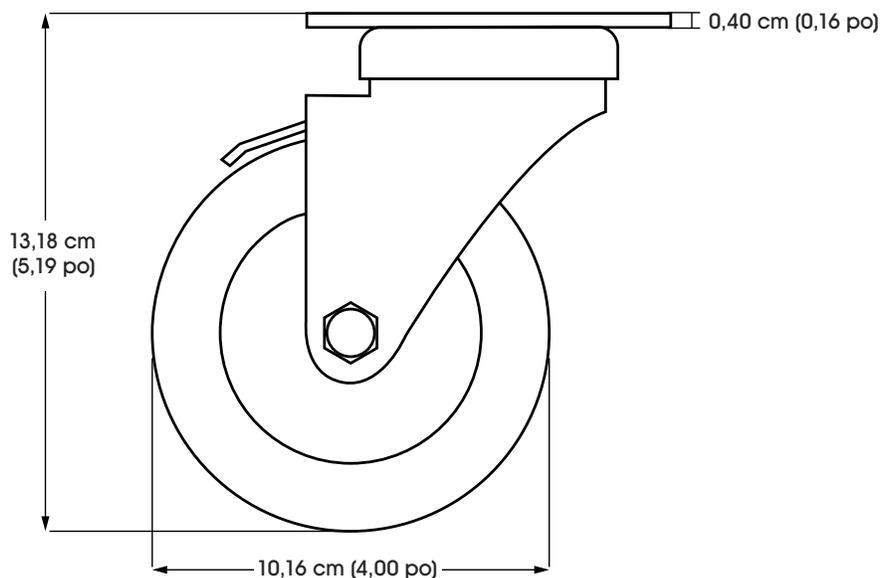

VUE AVANT

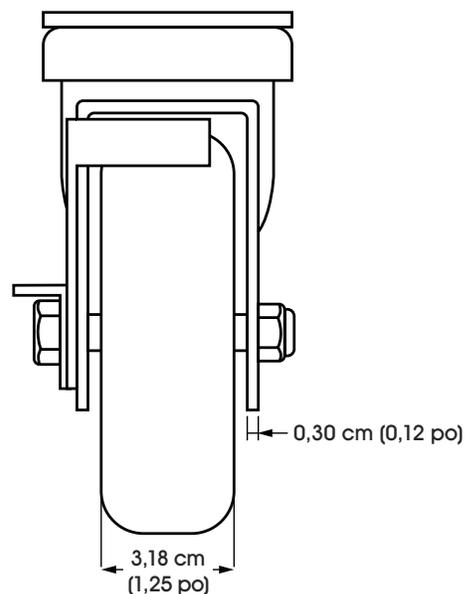

SPÉCIFICATIONS

N° DE MODÈLE	MATÉRIAU	TEMPÉRATURE DE FONCTIONNEMENT	DURETÉ DE LA ROUE	DESCRIPTION	CAPACITÉ	DIMENSIONS (diam. x larg.)
H-5535SWB	Polyoléfine	-29 °C à 82 °C (-20 °F à 180 °F)	65 (échelle Shore D)	Pivotant avec frein	124 kg (275 lb)	10,16 x 3,18 cm (4 x 1,25 po)
H-5537SWB	Caoutchouc	-40 °C à 79 °C (-40 °F à 175 °F)	75 (échelle Shore A)			
H-5539SWB	Polyuréthane	-40 °C à 79 °C (-40 °F à 175 °F)	95 (échelle Shore A)			