



H-5535S, H-5537S  
H-5539S

1-800-295-5510  
uline.com

# 4 x 1 1/4" SWIVEL CASTER



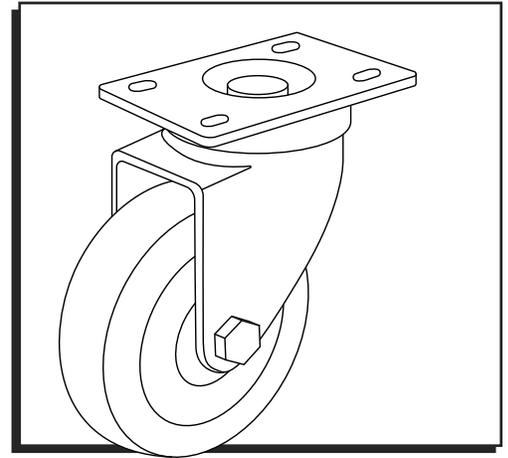



PLATE DIMENSIONS

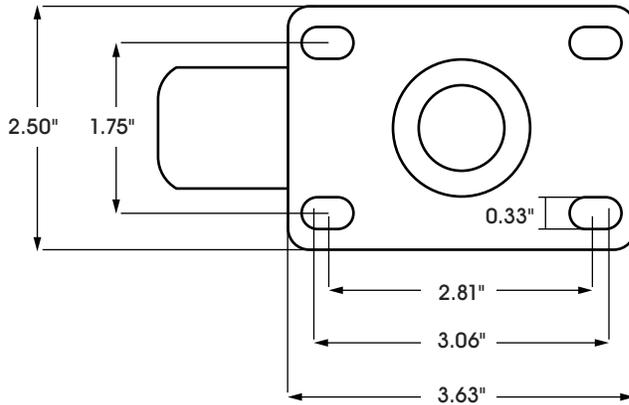

SIDE VIEW

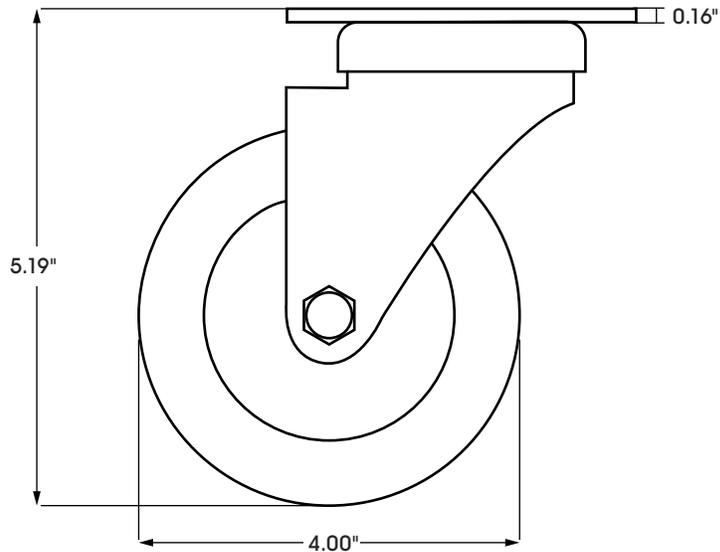


FRONT VIEW

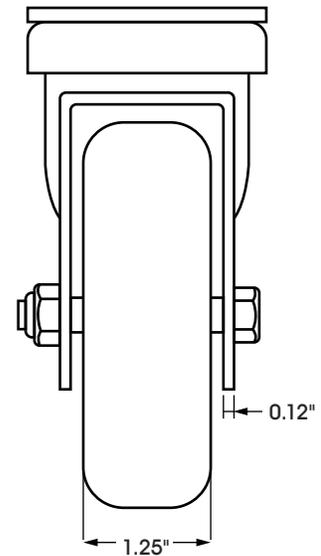


## SPECIFICATIONS

MODEL #	MATERIAL	OPERATING TEMPERATURE	WHEEL HARDNESS	DESCRIPTION	CAPACITY	SIZE (DIAM. x W)
H-5535S	Polyolefin	-20 to 180°F	65 (Shore D Scale)	Swivel	275 lbs.	4 x 1.25"
H-5537S	Rubber	-40 to 175°F	75 (Shore A Scale)			
H-5539S	Polyurethane	-40 to 175°F	95 (Shore A Scale)			


**RUEDA GIRATORIA – 4 x 1¼"**

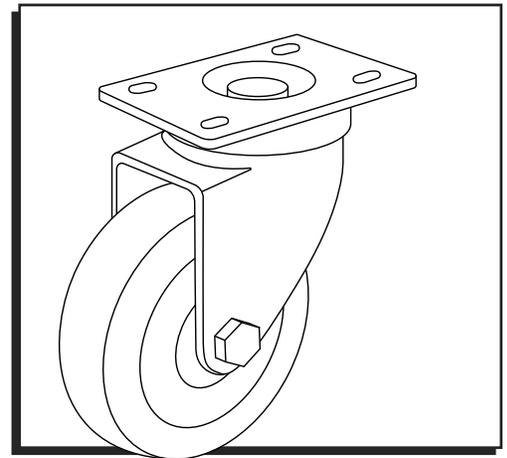


**DIMENSIONES DE LA PLACA**

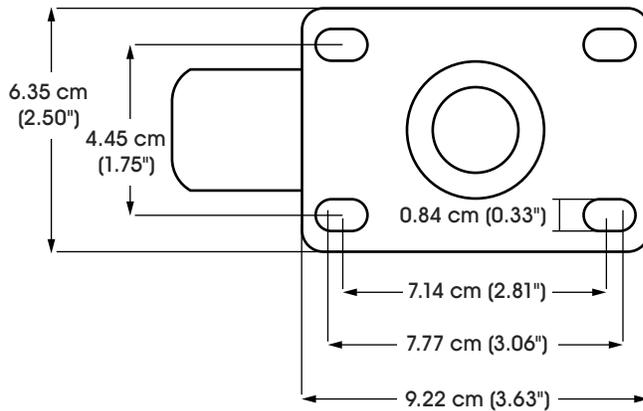

**VISTA LATERAL**

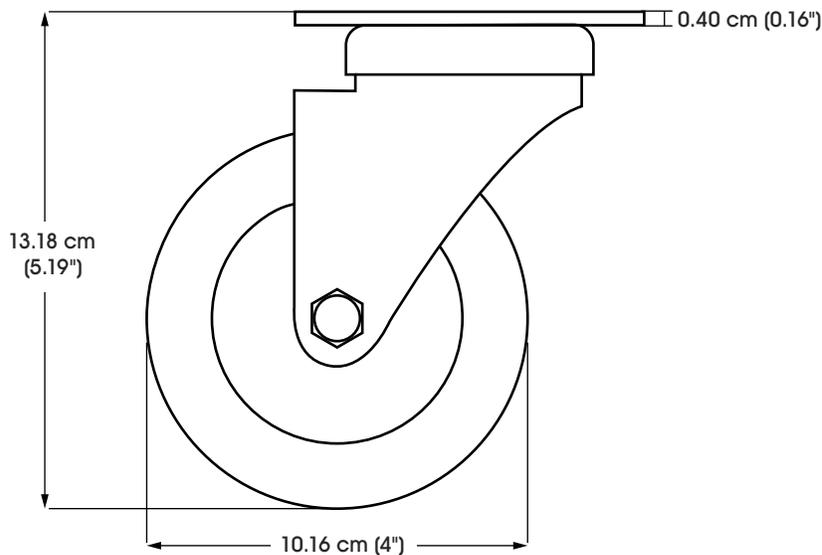


**VISTA FRONTAL**

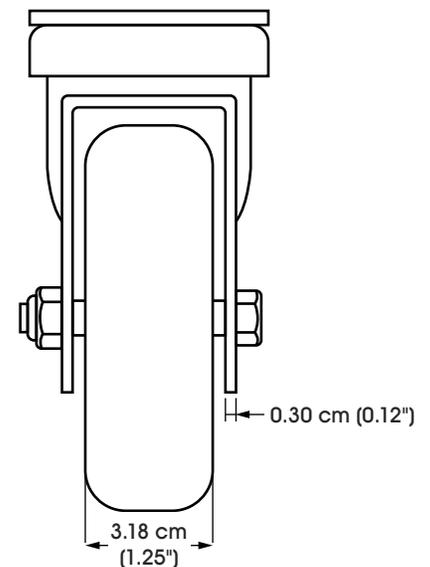


**ESPECIFICACIONES**

MODELO NO.	MATERIAL	TEMPERATURA DE FUNCIONAMIENTO	DUREZA DE LLANTA	DESCRIPCIÓN	CAPACIDAD	TAMAÑO (DIÁM. x ANCHO)
H-5535S	Poliiolefina	-29°C a 82°C (-20° a 180°F)	65 (Escala Shore D)	Giratoria	124 kg (275 lbs.)	10.16 x 3.18 cm (4 x 1.25")
H-5537S	Caucho	-40°C a 79°C (-40° a 175°F)	75 (Escala Shore A)			
H-5539S	Poliuretano	-40°C a 79°C (-40° a 175°F)	95 (Escala Shore A)			


**ROULETTE PIVOTANTE –  
4 x 1 ¼ po**

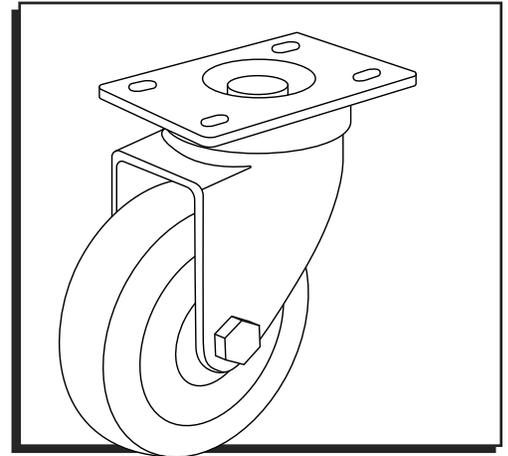


**DIMENSIONS DE LA PLAQUE**

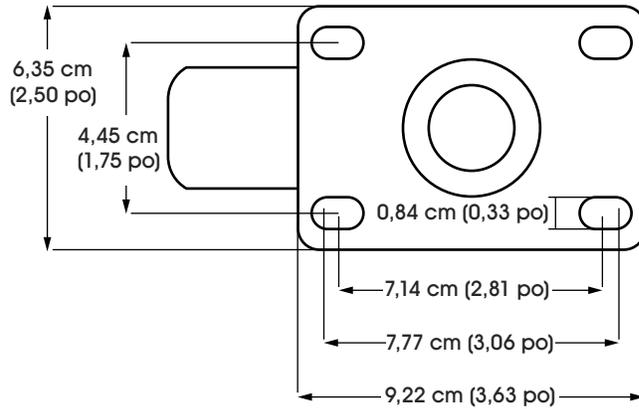

**VUE LATÉRALE**

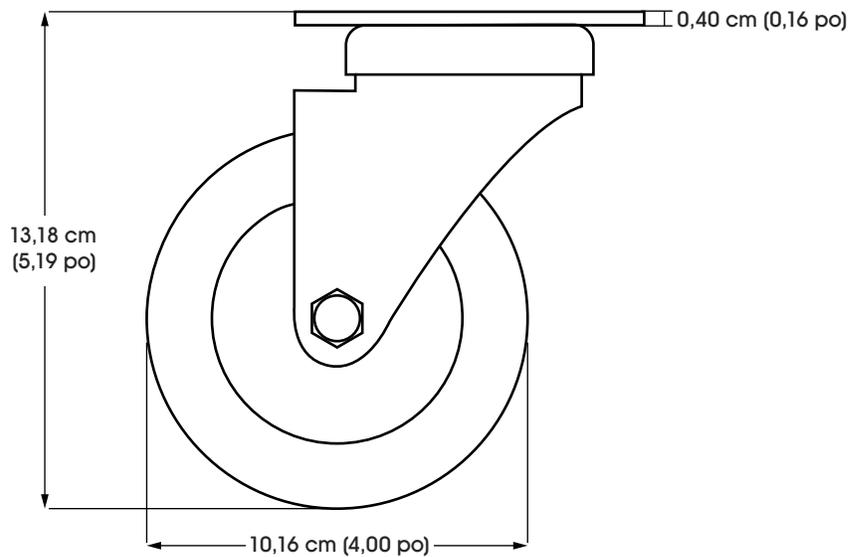

**VUE AVANT**

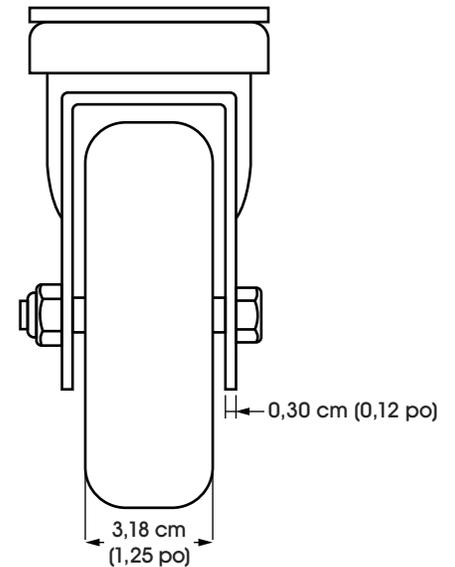

**SPÉCIFICATIONS**

N° DE MODÈLE	MATÉRIAU	TEMPÉRATURE DE FONCTIONNEMENT	DURETÉ DE LA ROUE	DESCRIPTION	CAPACITÉ	DIMENSIONS (diam. x larg.)
H-5535S	Polyoléfine	-29 °C à 82 °C (-20 °F à 180 °F)	65 (échelle Shore D)	Pivotant	124 kg (275 lb)	10,16 x 3,18 cm (4 x 1,25 po)
H-5537S	Caoutchouc	-40 °C à 79 °C (-40 °F à 175 °F)	75 (échelle Shore A)			
H-5539S	Polyuréthane	-40 °C à 79 °C (-40 °F à 175 °F)	95 (échelle Shore A)			