



H-5536R, H-5538R
H-5540R

5 x 1 1/4" RIGID CASTER

1-800-295-5510
uline.com



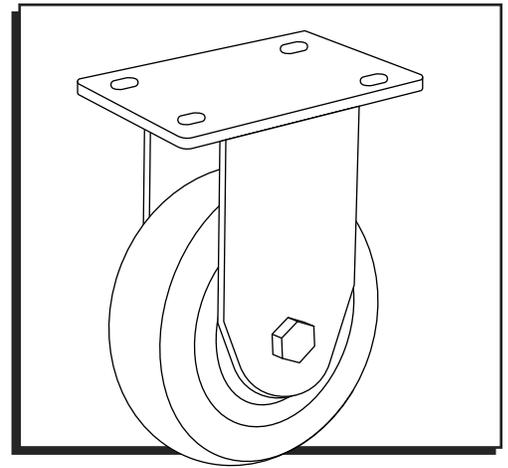



PLATE DIMENSIONS

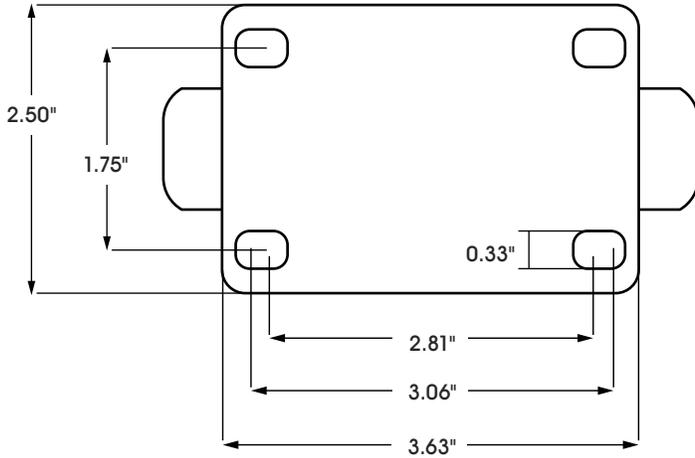

SIDE VIEW

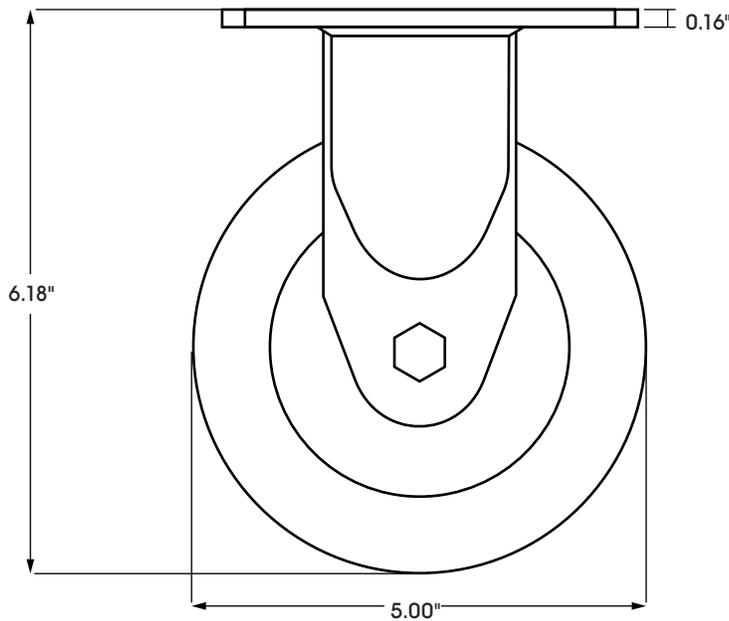


FRONT VIEW

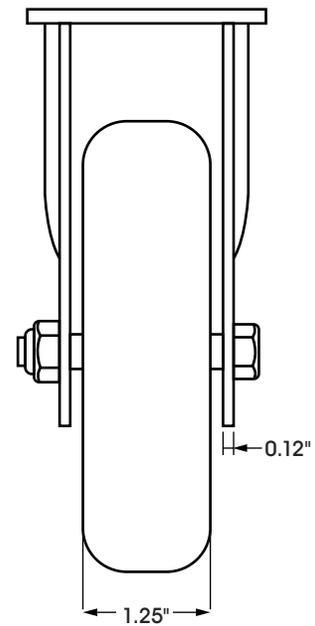


SPECIFICATIONS


MODEL #	MATERIAL	OPERATING TEMPERATURE	WHEEL HARDNESS	DESCRIPTION	CAPACITY	SIZE (DIAM. x W)
H-5536R	Polyolefin	-20 to 180°F	65 (Shore D Scale)	Rigid	300 lbs.	5 x 1.25"
H-5538R	Rubber	-40 to 175°F	75 (Shore A Scale)			
H-5540R	Polyurethane	-40 to 175°F	95 (Shore A Scale)			

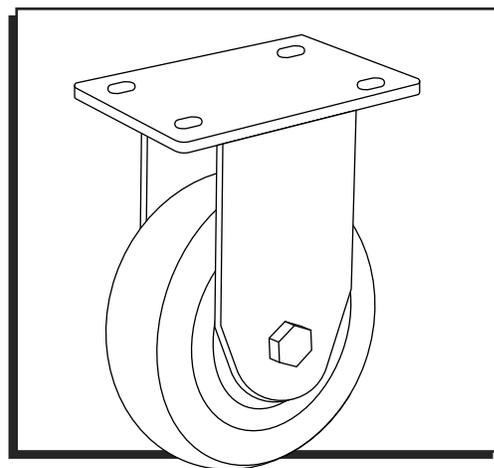


DIMENSIONES DE LA PLACA

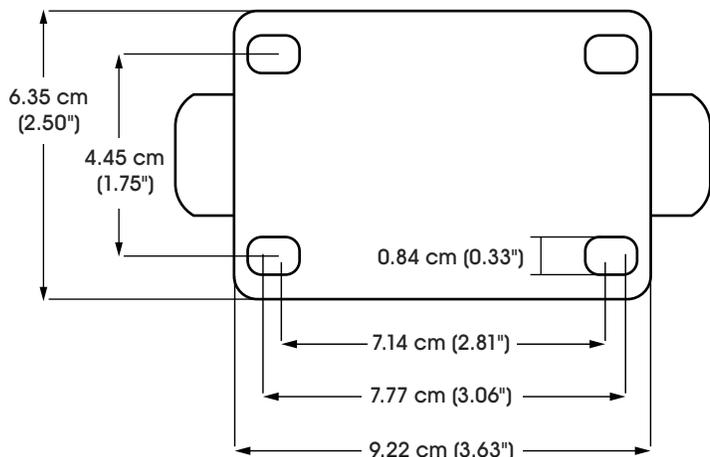

VISTA LATERAL

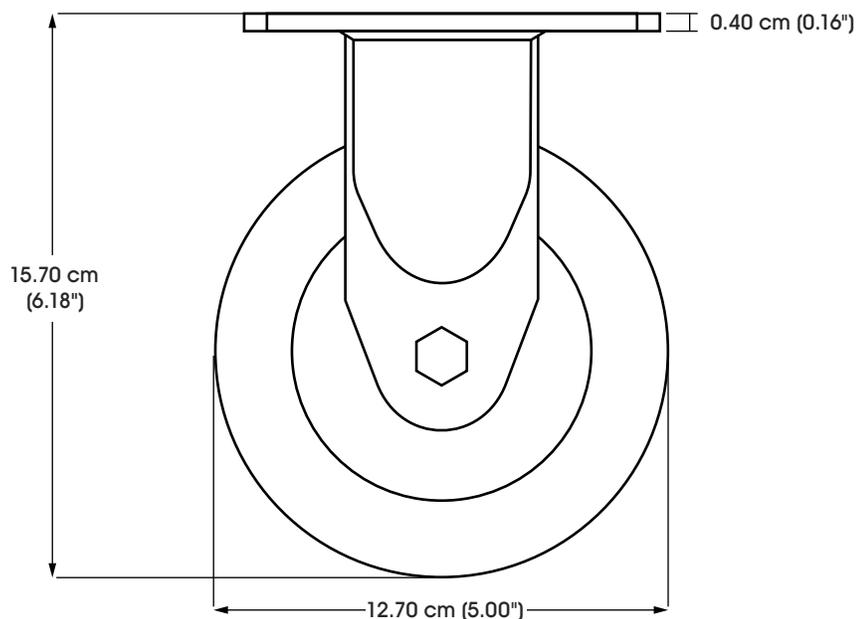


VISTA FRONTAL

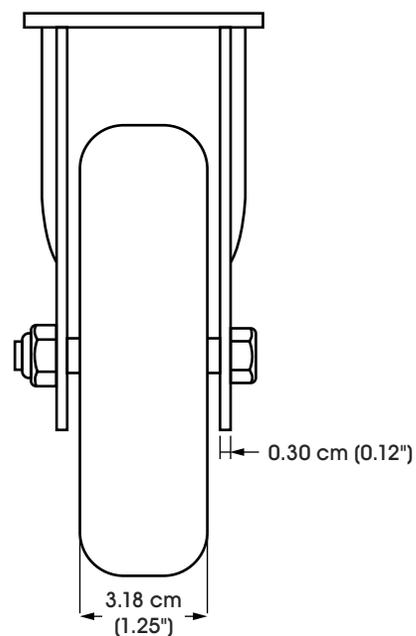


ESPECIFICACIONES

MODELO NO.	MATERIAL	TEMPERATURA DE FUNCIONAMIENTO	DUREZA DE LLANTA	DESCRIPCIÓN	CAPACIDAD	TAMAÑO (DIÁM. x ANCHO)
H-5536R	Poliiolefina	-29°C a 82°C (-20° a 180°F)	65 (Escala Shore D)	Rígida	136 kg (300 lbs.)	12.70 x 3.18 cm (5 x 1.25")
H-5538R	Caucho	-40°C a 79°C (-40° a 175°F)	75 (Escala Shore A)			
H-5540R	Poliuretano	-40°C a 79°C (-40° a 175°F)	95 (Escala Shore A)			


ROULETTE FIXE – 5 x 1 ¼ po

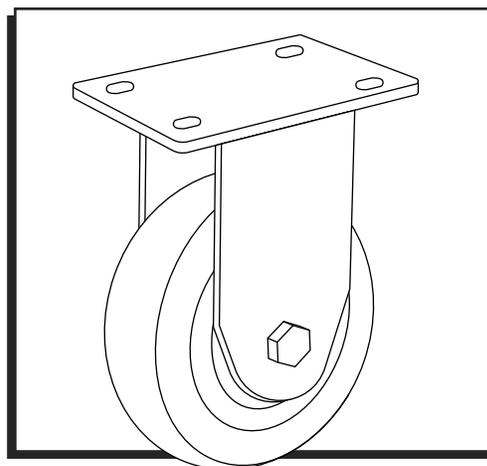


DIMENSIONS DE LA PLAQUE

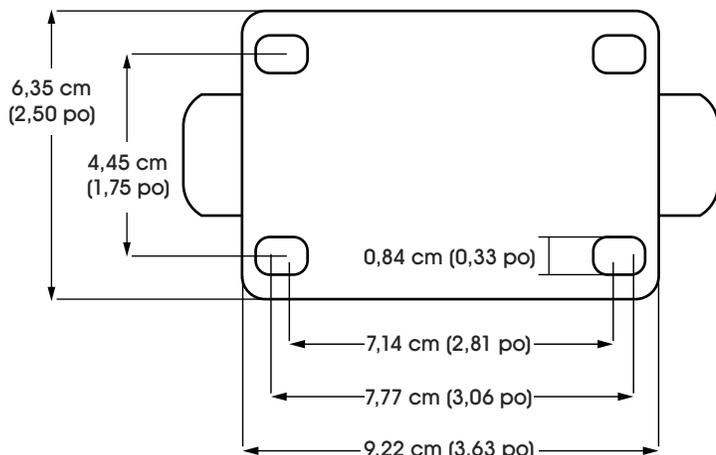

VUE LATÉRALE

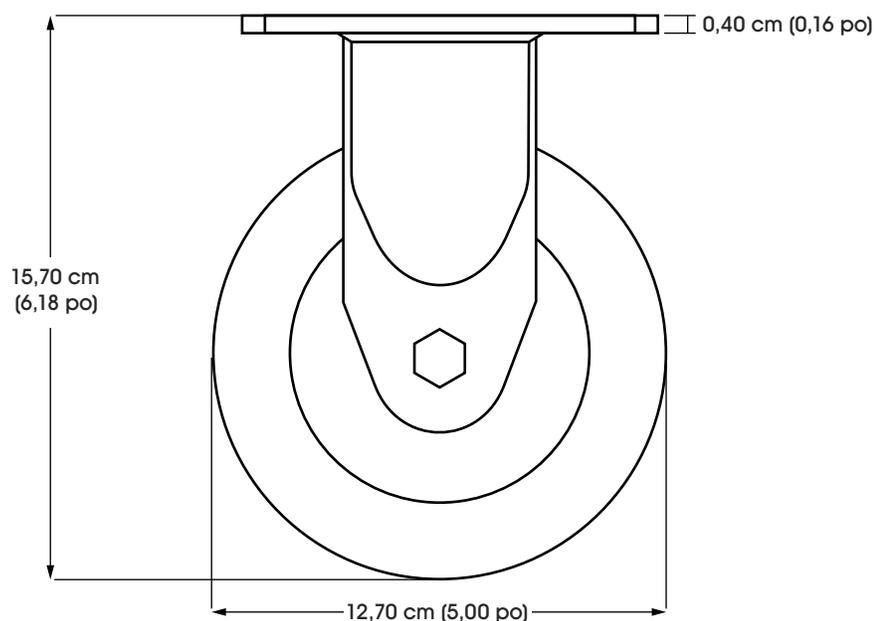

VUE AVANT

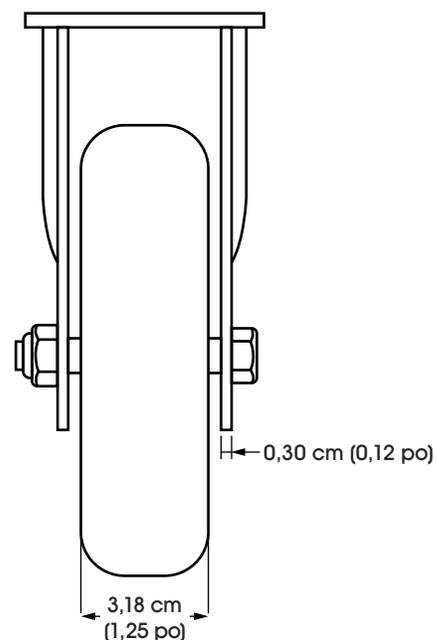

SPÉCIFICATIONS

N° DE MODÈLE	MATÉRIAU	TEMPÉRATURE DE FONCTIONNEMENT	DURETÉ DE LA ROUE	DESCRIPTION	CAPACITÉ	DIMENSIONS (diam. x larg.)
H-5536R	Polyoléfine	-29 °C à 82 °C (-20 °F à 180 °F)	65 (échelle Shore D)	Fixe	136 kg (300 lb)	12,70 x 3,18 cm (5 x 1,25 po)
H-5538R	Caoutchouc	-40 °C à 79 °C (-40 °F à 175 °F)	75 (échelle Shore A)			
H-5540R	Polyuréthane	-40 °C à 79 °C (-40 °F à 175 °F)	95 (échelle Shore A)			