



H-5536S, H-5538S
H-5540S

1-800-295-5510
uline.com

5 x 1 1/4" SWIVEL CASTER



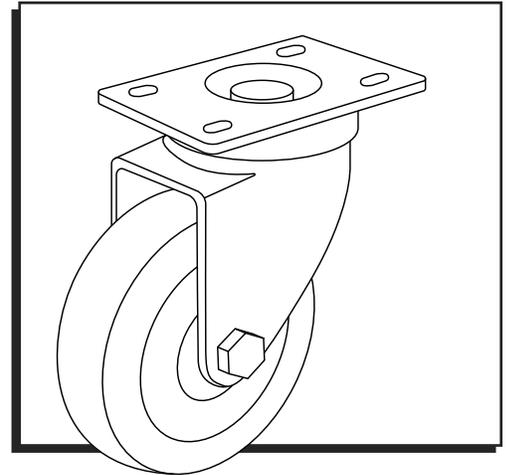



PLATE DIMENSIONS

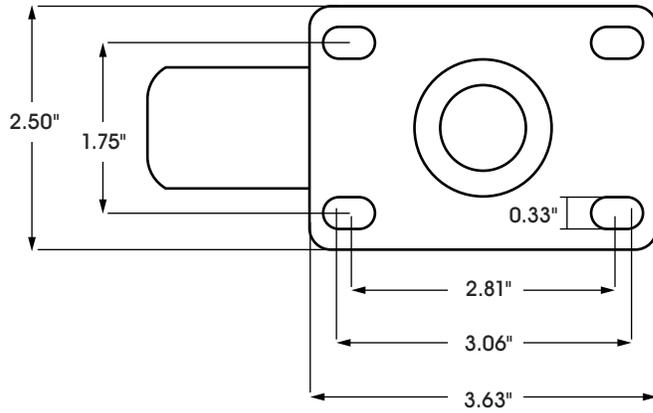

SIDE VIEW

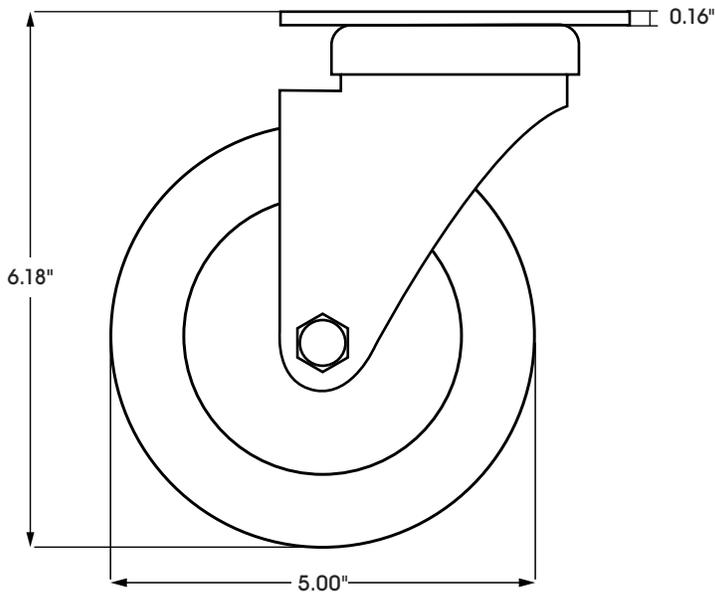


FRONT VIEW

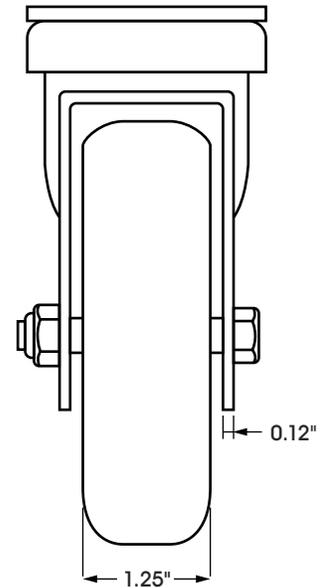


SPECIFICATIONS

| MODEL # | MATERIAL | OPERATING TEMPERATURE | WHEEL HARDNESS | DESCRIPTION | CAPACITY | SIZE (DIAM. x W) |
|---------|--------------|-----------------------|--------------------|-------------|----------|------------------|
| H-5536S | Polyolefin | -20 to 180°F | 65 (Shore D Scale) | Swivel | 300 lbs. | 5 x 1.25" |
| H-5538S | Rubber | -40 to 175°F | 75 (Shore A Scale) | | | |
| H-5540S | Polyurethane | -40 to 175°F | 95 (Shore A Scale) | | | |


RUEDA GIRATORIA – 5 x 1¼"

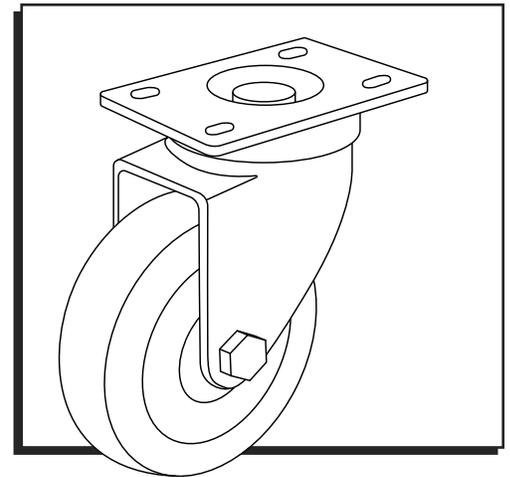


DIMENSIONES DE LA PLACA

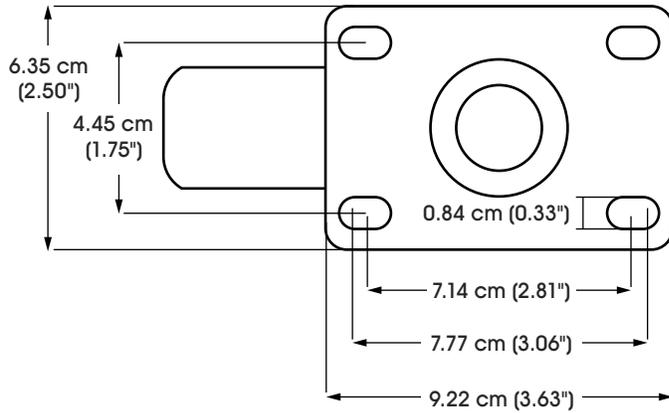

VISTA LATERAL

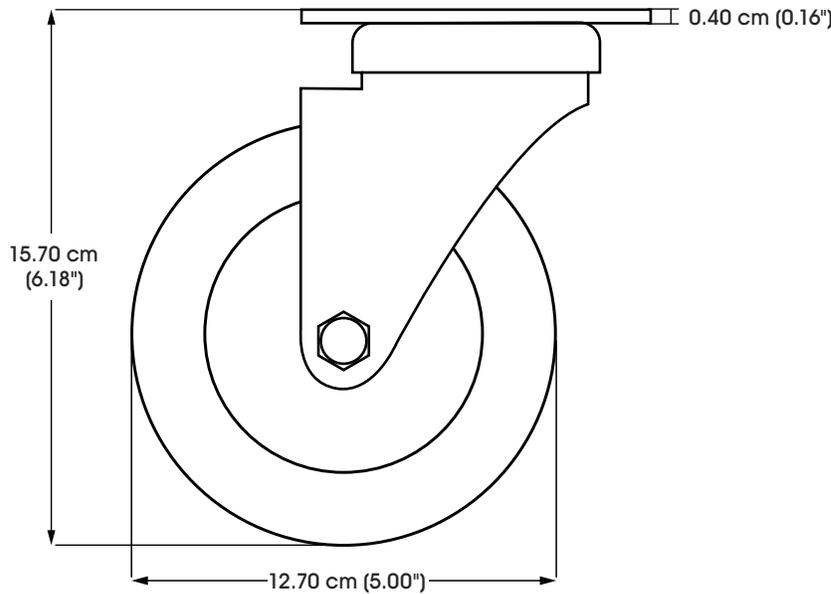


VISTA FRONTAL

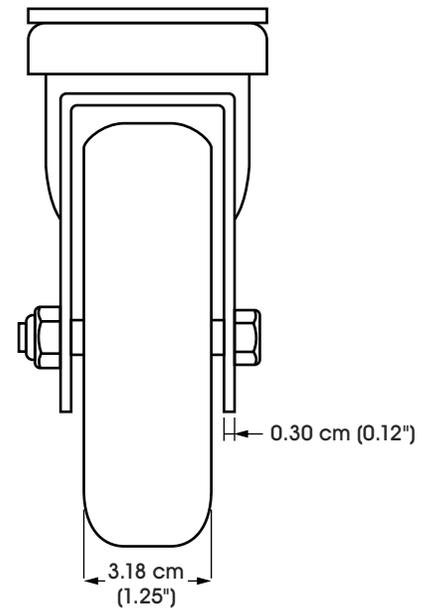


ESPECIFICACIONES

| MODELO NO. | MATERIAL | TEMPERATURA DE FUNCIONAMIENTO | DUREZA DE LLANTA | DESCRIPCIÓN | CAPACIDAD | TAMAÑO (DIÁM. x ANCHO) |
|------------|--------------|--------------------------------|---------------------|-------------|-------------------|--------------------------------|
| H-5536S | Poliiolefina | -29°C a 82°C (-20° a 180°F) | 65 (Escala Shore D) | Giratoria | 136 kg (300 lbs.) | 12.70 x 3.18 cm (5 x 1.25") |
| H-5538S | Caucho | -40°C a 79°C (-40° a 175°F) | 75 (Escala Shore A) | | | |
| H-5540S | Poliuretano | -40°C a 79°C (-40° a 175°F) | 95 (Escala Shore A) | | | |


**ROULETTE PIVOTANTE –
5 x 1 ¼ po**

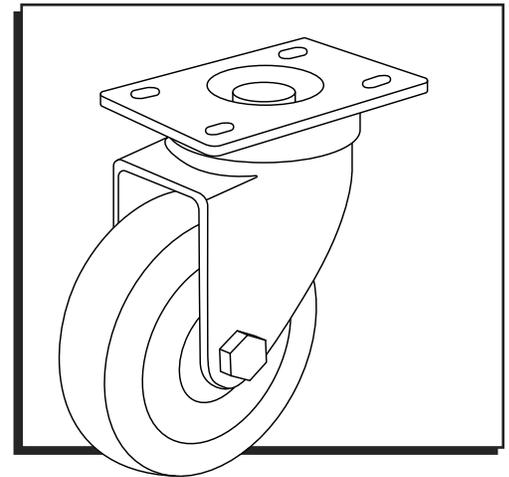


DIMENSIONS DE LA PLAQUE

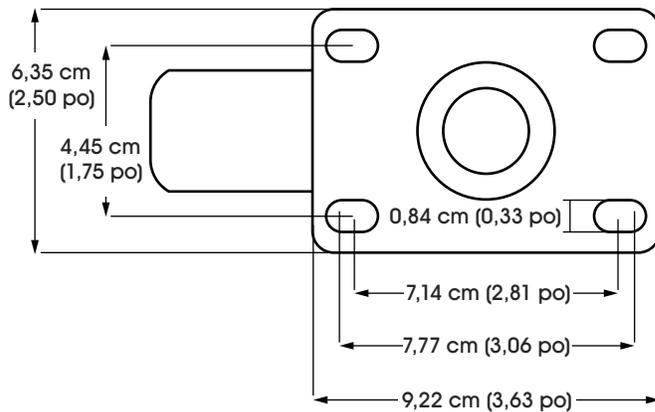

VUE LATÉRALE

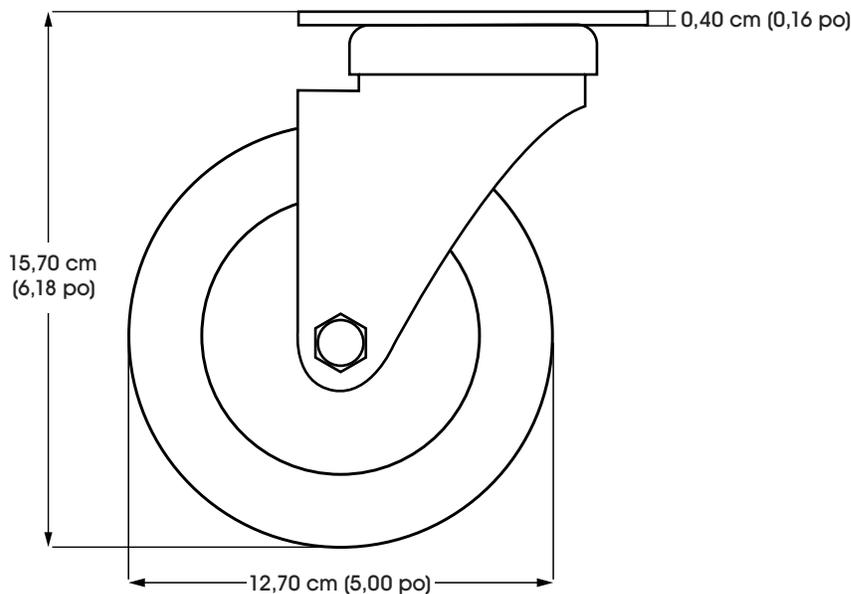

VUE AVANT

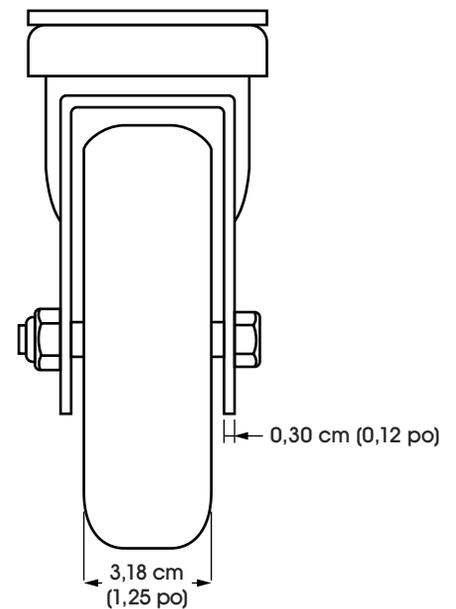

SPÉCIFICATIONS

| N° DE MODÈLE | MATÉRIAU | TEMPÉRATURE DE FONCTIONNEMENT | DURETÉ DE LA ROUE | DESCRIPTION | CAPACITÉ | DIMENSIONS (diam. x larg.) |
|--------------|--------------|-------------------------------------|----------------------|-------------|-----------------|----------------------------------|
| H-5536S | Polyoléfine | -29 °C à 82 °C (-20 °F à 180 °F) | 65 (échelle Shore D) | Pivotant | 136 kg (300 lb) | 12,70 x 3,18 cm (5 x 1,25 po) |
| H-5538S | Caoutchouc | -40 °C à 79 °C (-40 °F à 175 °F) | 75 (échelle Shore A) | | | |
| H-5540S | Polyuréthane | -40 °C à 79 °C (-40 °F à 175 °F) | 95 (échelle Shore A) | | | |