

ULINE S-26612

HUBBELL® DUPLEX RECEPTACLES


15A, RESIDENTIAL, TAMPER-RESISTANT

1-800-295-5510


uline.com

OUTLET


15A 125V AC
NEMA 5-15R



FRONT VIEW

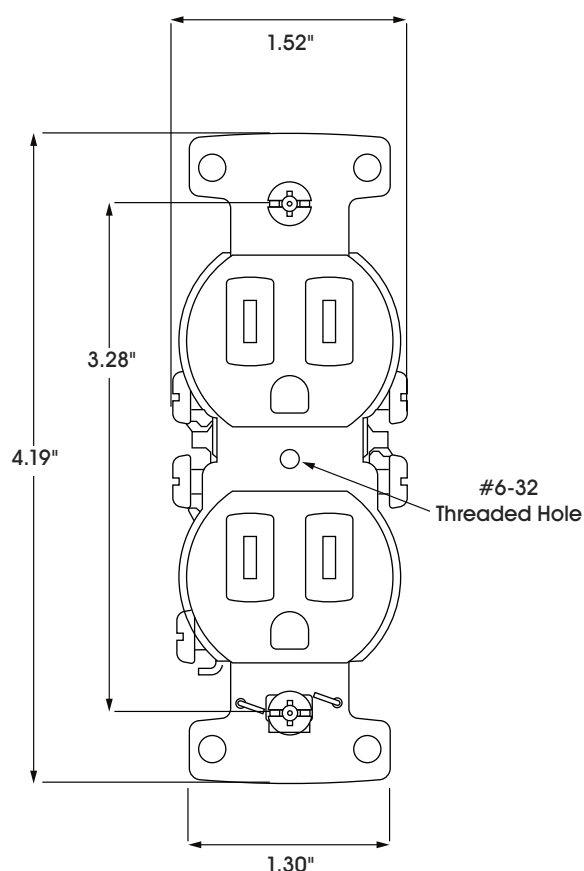

SIDE VIEW

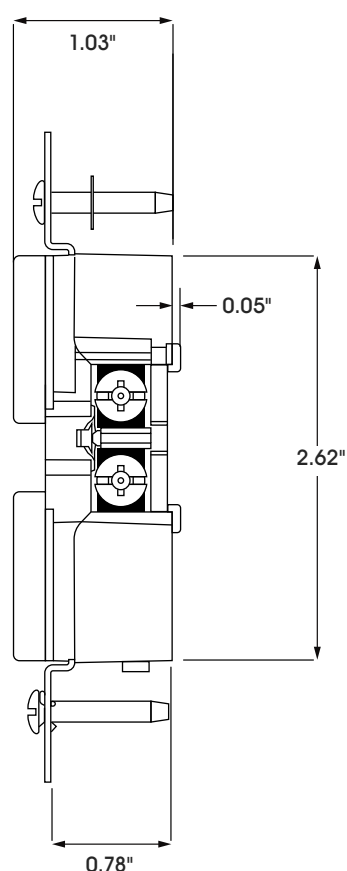

SPECIFICATIONS

FACE	BASE	POWER CONTACTS	GROUND CONTACTS	TERMINAL SCREWS	AUTO SELF-GROUNDING STAPLE	MOUNTING SCREWS
PVC	PVC	Brass	Brass	Plated Steel	Stainless Steel	Zinc Plated Steel

SPECIFICATIONS CONTINUED

PERFORMANCE	
ELECTRICAL	
Current Interrupting	Certified full rated current.
Dielectric Voltage	Withstands 1,500V minimum
MECHANICAL	
Terminal Accommodation	Terminal screws accept up to #12 AWG. Push wire designed for #14 AWG solid copper wire only.
ENVIRONMENTAL	
Conditions	Indoor, dry unless protected by additional means
Flammability	UL 94 V-2
Operating Temperature	-4-140°F

Description

Tamper-resistant, self-grounding.
Hubbell® RR15SWTR, RR15SLATR

Features

- Smooth indented face appearance
- Multiple-drive Flat/Phillips/Robertson head screws
- Tough thermoplastic ultrasonically welded cover and base

Listings

- UL Listed (U.S. and Canada)
- UL Listed to UL 498
- Certified to CSA 22.2, No. 42

ULINE

1-800-295-5510
uline.com