


ULINE S-26613
HUBBELL® DUPLEX RECEPTACLES
 15A, COMMERCIAL, STANDARD

1-800-295-5510
 uline.com

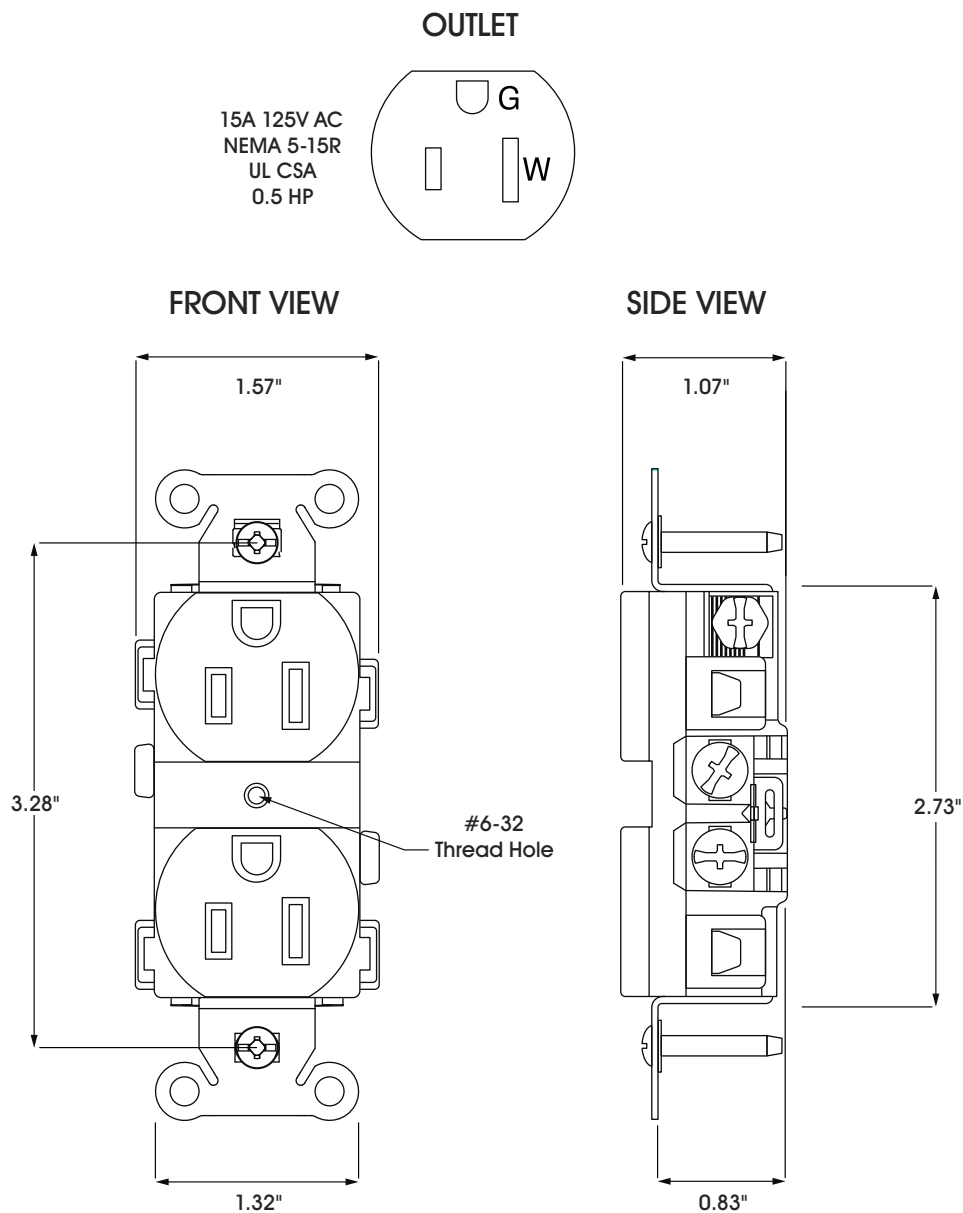

SPECIFICATIONS

FACE	BASE	POWER CONTACTS	GROUND CONTACTS	WIRE CLAMP	TERMINAL SCREWS	MOUNTING STRAP	AUTO SELF-GROUNDING STAPLE	MOUNTING SCREWS
Nylon	Nylon	Brass	Brass	Nickel Plated Steel	Plated Steel	Galvanized Steel	Stainless Steel	Galvanized Steel

SPECIFICATIONS CONTINUED

PERFORMANCE	
ELECTRICAL	
Current Interrupting	Certified full rated current
Dielectric Voltage	Withstands 2,000V minimum
MECHANICAL	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-10 AWG copper stranded or solid conductor only
Terminal Identification	UL 498, CSA
ENVIRONMENTAL	
Flammability	UL 94 V-2
Operating Temperature	-40-167°F

Description

Smooth face, back and side wired.
Hubbell® BR15WHI, BR15LA

Features

- Easy access split circuit tab
- Nylon face and base
- Wrap-around galvanized steel strap
- Triple wipe contacts

Listings

- UL Listed (U.S. and Canada)
- UL 498 File No. E2186
- Certified to CSA C22.2, No. 42
- NEMA® WD-6 Compliant

ULINE

1-800-295-5510
uline.com