

ULINE

S-26619


HUBBELL®

ELECTRICAL SWITCH

15A, COMMERCIAL, TOGGLE, SINGLE POLE

1-800-295-5510

uline.com

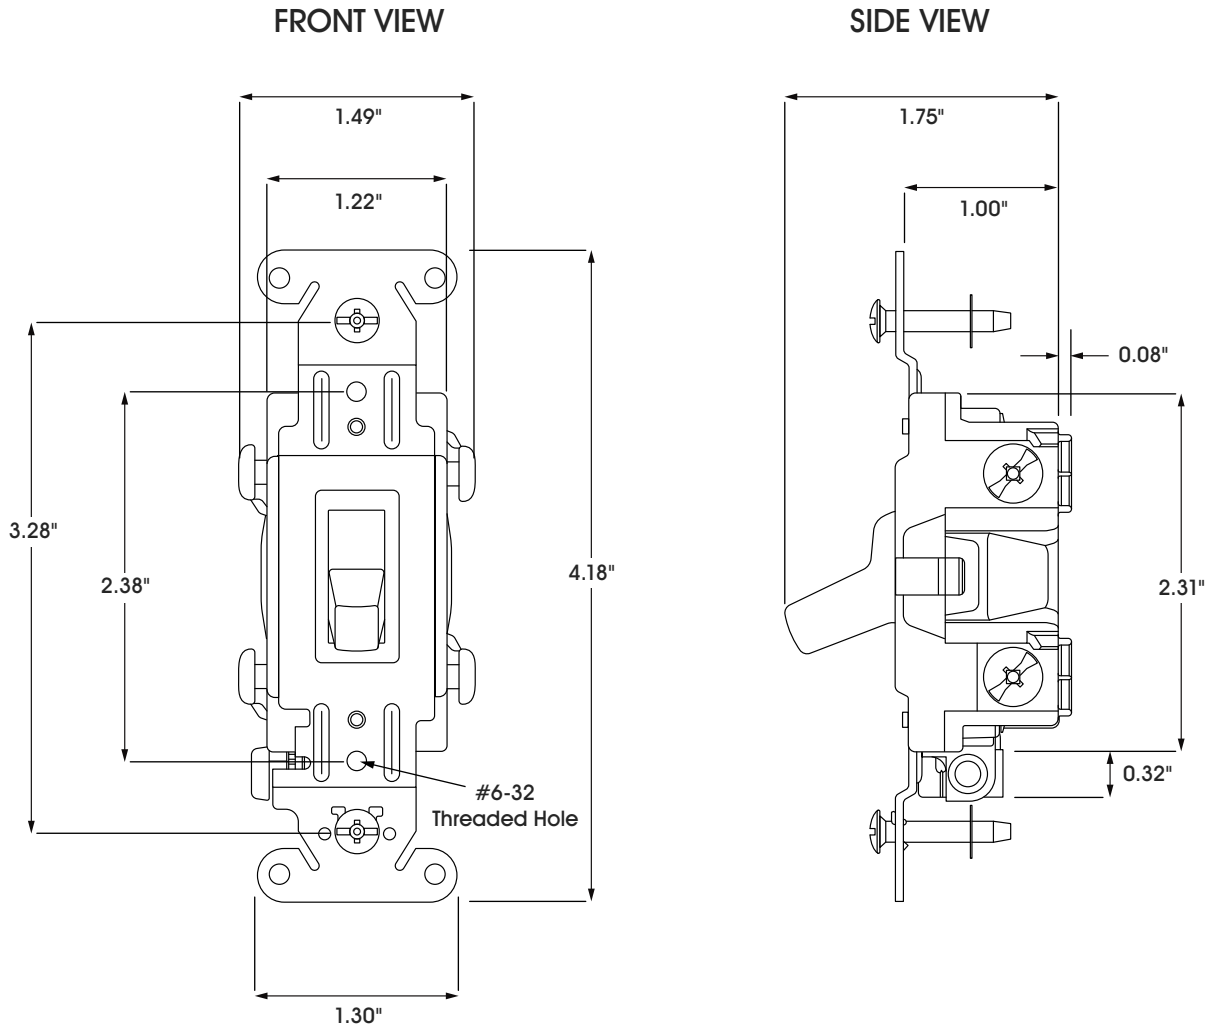

SPECIFICATIONS

TOP MATERIAL	BASE MATERIAL	TOGGLE MATERIAL	GROUND CONTACTS	TERMINAL SCREWS	AUTO GROUNDING MOUNTING BRIDGE	GROUND SCREW
Thermoplastic	Thermoplastic	Nylon	Silver Alloy	Brass	Zinc Plated Steel	Brass (Green)

SPECIFICATIONS CONTINUED

PERFORMANCE	
ELECTRICAL	
Dielectric Voltage	Withstands 1,500V AC minimum for 1 minute
Max. Continuous Current	15A
Max. Working Voltage	277V AC
Overload	Min. 4.8 times rated current for 100 cycles
Temperature Rise	86°F maximum at rated current
MECHANICAL	
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
ENVIRONMENTAL	
Flammability	UL 94 V-2
Operating Temperature	-40-167°F

Description

Toggle, back and side wired.
Hubbell® CSB115W, CSB115LA

Features

- Thread cleaning captive mounting screw
- Abuse-resistant nylon toggle
- Steel, zinc plated bridge is corrosion-resistant

Listings

- UL Listed (U.S. and Canada)
- CSA Certified
- Fed. Spec. W-S-896

ULINE

1-800-295-5510
uline.com