

ULINE

S-26626


HUBBELL®

GFCI RECEPTACLES

20A, COMMERCIAL, TAMPER-RESISTANT

1-800-295-5510

uline.com

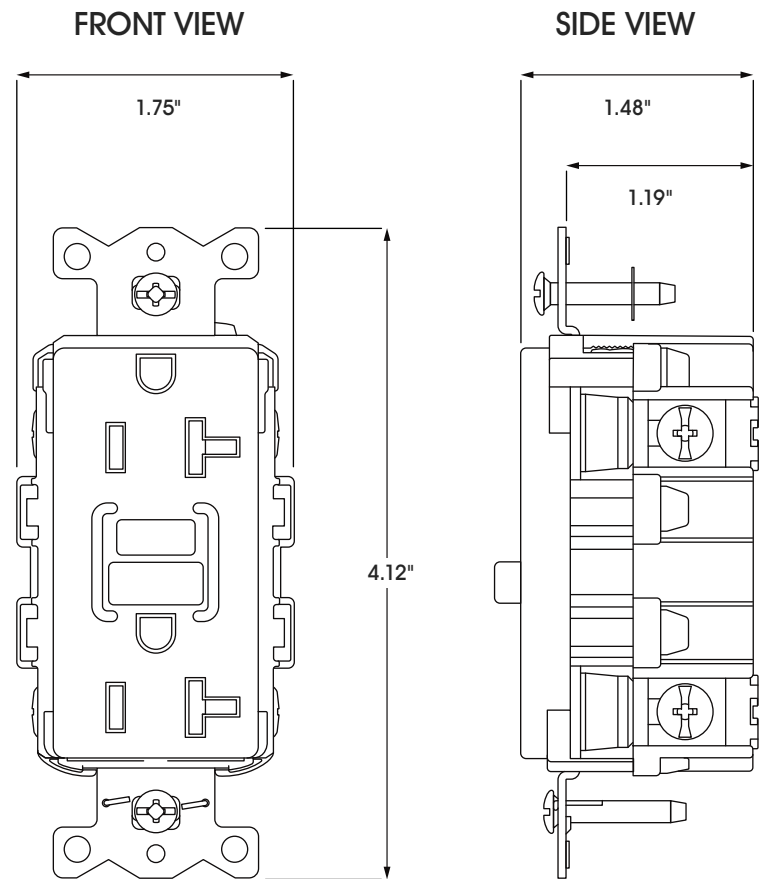

SPECIFICATIONS

FACE MATERIAL	BASE MATERIAL	POWER CONTACTS	GROUND CONTACTS	AUTO SELF-GROUNDING STAPLE	MOUNTING STRAP	MOUNTING SCREWS
Nylon	Nylon	Brass	Brass	Stainless Steel	Zinc Plated Steel	Zinc Plated Steel

SPECIFICATIONS CONTINUED

PERFORMANCE	
ELECTRICAL	
Current Interrupting	Certified full rated current
Dielectric Voltage	Withstands 1,500V minimum
Trip Level	4 to 6 mA
Trip Time	.025 second nominal
Frequency	60 Hz
Voltage	120V AC +10% – 15% (102V to 132V)
Amperage	15A/20A, 20A Feed Thru
Maximum Interrupting Capacity	10,000A
MECHANICAL	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
ENVIRONMENTAL	
Flammability	UL 94 V-2
Operating Temperature	-30-150°F

Description

20A, 125V, Style Line®, AUTOGUARD® self test GFCI receptacle, tamper-resistant, flush face, back and side wired, tri-drive screws.

Hubbell® GFRTR20W, GFRTR20LA

Features

- Patented shutter design for tamper-resistant
- Compliant with NEC® 406.12 and NEC® 517-18(c)
- Patented AUTOGUARD® self test technology
- Triple wipe construction
- Single LED status indicator
 - GREEN indicates power
 - RED indicates a trip
 - FLASHING RED indicates end of life

Listings

- UL Listed (U.S. and Canada)
- UL 943 Class A for GFCIs UL File E41978
- Meets ADA Standards
- Meets all NEC® and CEC requirements
- CSA Certified
- NEMA® WD-6 ANSI 73 Compliant

ULINE

1-800-295-5510
uline.com