


ULINE

TAPE GUIDE

WHICH TAPE SHOULD I USE?

FEATURE	Uline Industrial	Uline Economy	Uline Natural Rubber - Polypropylene	Uline Natural Rubber - PVC
Adhesion to Corrugated	Excellent	Good	Excellent	Excellent
Application Temperature Range	0° – 140°F	50° – 110°F	0° – 150°F	0° – 150°F
Performance Temperature Range	-60° – 140°F	30° – 140°F	-22° – 265°F	-4° – 160°F
Clarity	Excellent	Good	Good	Good
Moisture Resistance	Very Good	Fair	Very Good	Very Good


WHICH MIL SHOULD I USE?

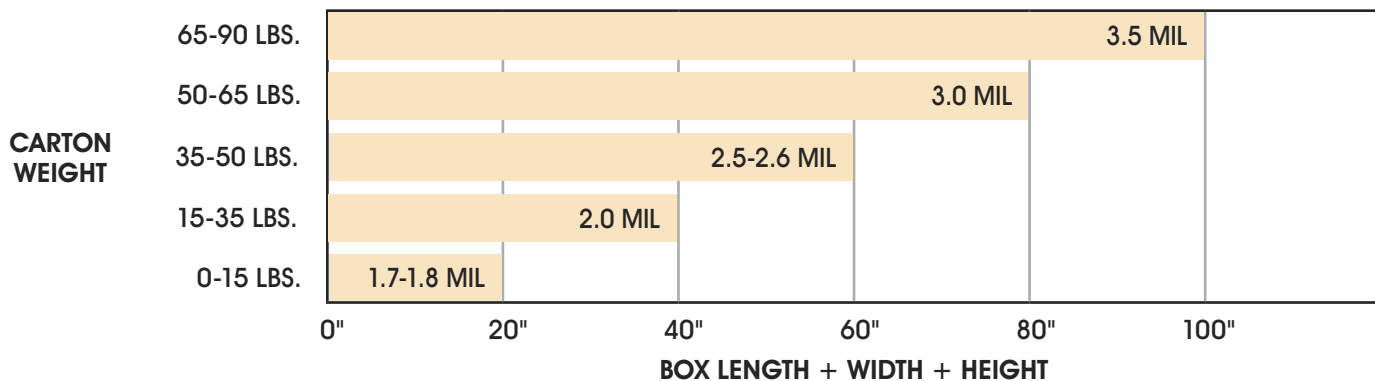

HELPFUL HINTS

- Always seal boxes with one strip of tape.
- If you are using 2 strips of 2" tape, try a 3" tape or a thicker mil. This will save time and money.

2"	<ul style="list-style-type: none"> • For boxes 15" wide or less.
3"	<ul style="list-style-type: none"> • Boxes over 16" wide. • Underfilled RSC boxes. • Overstuffed boxes. • Difficult to adhere surfaces.



1-800-295-5510 uline.com