



ULINE H-4933-MBSET MOTOR BRUSH SET FOR ELECTRIC DRUM PUMP

1-800-295-5510
uline.com

TOOL NEEDED





Flathead Screwdriver

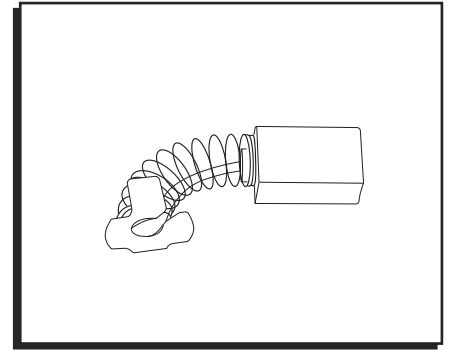

MOTOR BRUSH SET REPLACEMENT

1. Remove both brush covers with flathead screwdriver and remove brushes. (See Figure 1)
2. Align new brushes with opening and push into place. (See Figure 2)

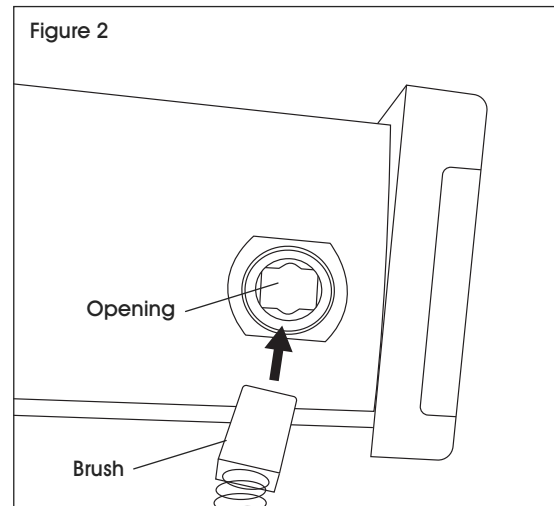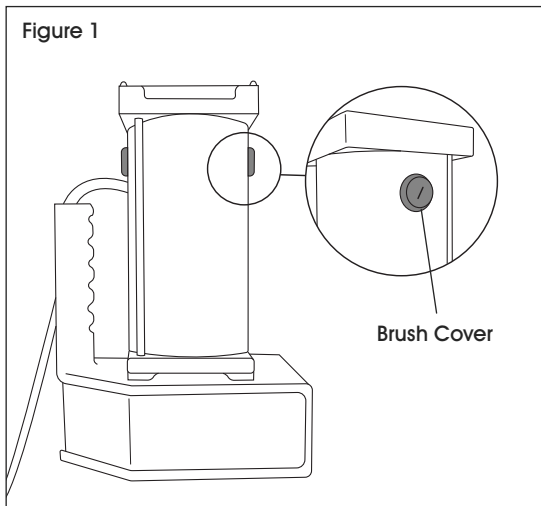


3. Thread brush covers back on.

ULINE H-4933-MBSET


SET DE CEPILLOS DEL MOTOR PARA BOMBA ELÉCTRICA PARA TAMBOS

800-295-5510
uline.mx

HERRAMIENTA NECESARIA





Desarmador Plano

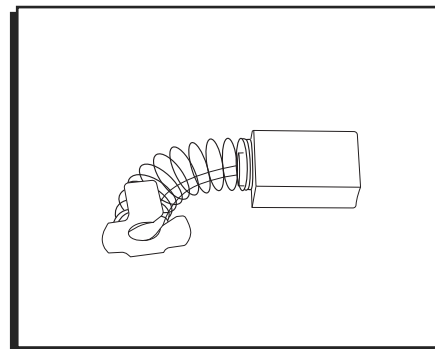

REEMPLAZAR EL SET DE CEPILLOS DEL MOTOR

1. Retire ambas cubiertas con el desarmador plano y retire los cepillos. (Vea Diagrama 1)
2. Alinee los cepillos nuevos con la abertura y presiónelos en su lugar. (Vea Diagrama 2)

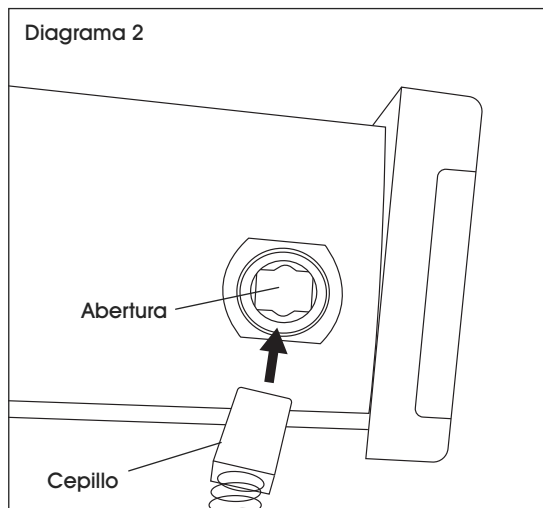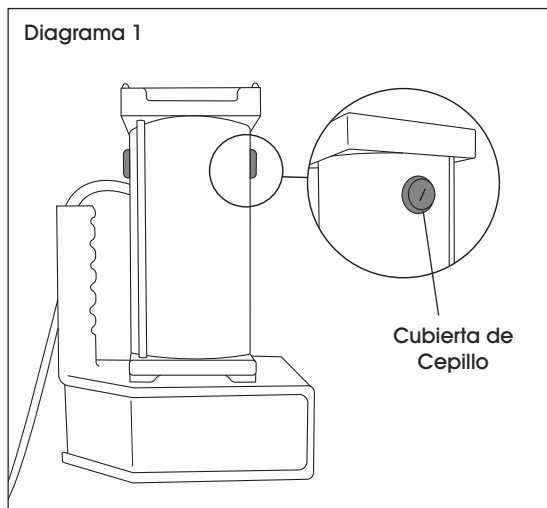


3. Enrosque las cubiertas de los cepillos de nuevo.

ULINE H-4933-MBSET


ENSEMBLE DE BALAI DU MOTEUR POUR POMPE À BARIL ÉLECTRIQUE

1 800 295-5510
uline.ca

OUTIL REQUIS




Tournevis à tête plate

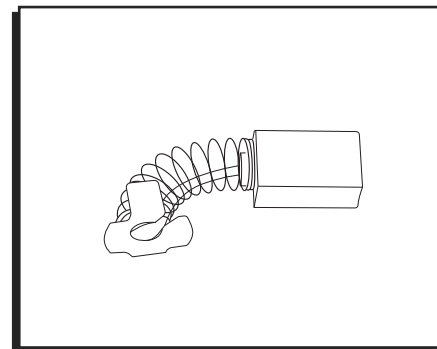


REPLACEMENT DE L'ENSEMBLE DE BALAI DU MOTEUR

1. Retirez les deux couvercles de balai à l'aide d'un tournevis à tête plate et retirez les balais. (Voir Figure 1)

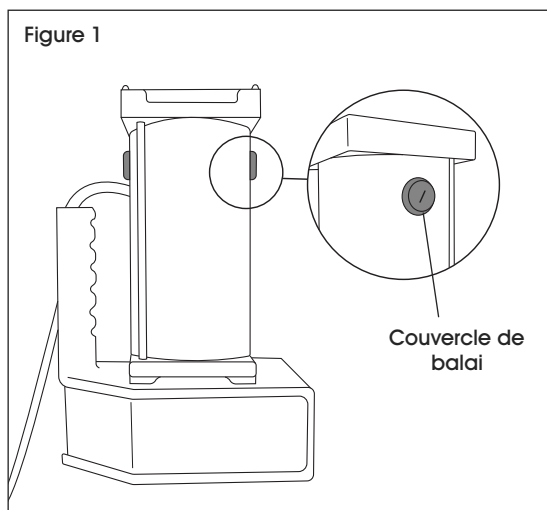

2. Alignez les nouveaux balais sur l'ouverture et poussez-les en place. (Voir Figure 2)

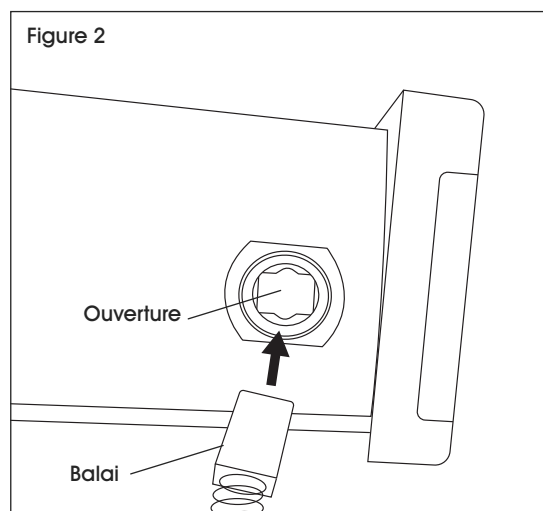

3. Revissez les couvercles de balai.